



ELIoT

Enhance Lighting for the Internet of Things

DELIVERABLE: D3.2

Open Reference Architecture

Contract number:	825651
Project acronym:	ELIoT
Project title:	Enhance Lighting for the Internet of Things
Project duration:	1 January 2019 – 31 December 2021
Coordinator:	Volker Jungnickel, Fraunhofer Heinrich Hertz Institute, Berlin, Germany

Deliverable Number:	D3.2
Type:	Report
Dissemination level:	PU
Date submitted:	30.04.2020

Authors:	Nokia;
Partners contributed	SIG, KPN, DTAG, HHI, FOKUS, MXL, TU/e



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIoT)

Abstract

The document introduces the ELIOT initial open reference architecture and shows its close relation to other standardized reference architectures. The open reference architecture for the future connected lighting infrastructure is aimed to facilitate integration of VLC into various IoT applications, as described and specified in the use cases section of this document and further extended through ongoing developments in ELIOT.

The defined architecture represents a common view on partitioning of end-to-end applications into functional building blocks, together with the identification of appropriate interfaces enabling, thus, the interworking of components made by different manufacturers. Architectural aspects of integration of LiFi into various kinds of networks, e.g. enterprise, industrial, or residential, but also 4G/5G mobile networks is addressed as well. The results will be made public at standardization meetings and conferences, and will guide the implementation of the reference model software that will be amended to the document in its final version D3.3.



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

Executive summary

This document defines a generic open reference architecture of PHY layer and DL layer functions of a LiFi communication interface together with system management functions for the interface as well as the adaptation layer to various network layer protocols in the data path. Optional extensions to the open reference architecture are proposed for representation of advanced features like AP function, fronthaul, and various kinds of MIMO deployments. The defined reference architecture is closely aligned with the reference models standardized in IEEE 802.11, IEEE 802.15.13, and ITU-T G.9991, and can be easily deployed in various IEEE 802 based access networks as defined in IEEE 802.1CF, as well as integrated with 5G systems following the 3GPP specification TS 23.501.

The open reference architecture is derived from architectural considerations of ELIOT use cases and adopts the generic layered architectural concepts of open systems interconnection as specified in ISO/IEC 7498-1, and follows industrial practices for defining open interfaces.

The related reference model software library is not covered yet in this document but will be further developed according to the presented architecture and amended in the final version D3.3.

The document facilitates standardized interfaces for LiFi communication interfaces to allow for easier deployment and adoption of the technology to a broad variety of use cases, to enable synergies in the design and development of circuitry and driver software, and to foster the market availability of interoperable chip solutions.



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

Index of terms

AMF	Authentication and Mobility management Function
AP	Access Point
ARC	Access Router Control
BW	BandWidth
CPU	Central Processing Unit
CSMA	Carrier Sense Multiple Access
DL	Data Link
DLL	Data Link Layer
DLSAP	DL Layer Service Access Point
DMT	Discrete MultiTone
DSL	Digital Subscriber Line
ETH	Ethernet
FOV	Field Of View
FTTH	Fiber To The Home
IP	Internet Protocol
LCI	Light Communication Interface
LC	Light Communication
LiFi	Light Fidelity
LLC	Logical Link Control
LLSAP	LLC Layer Service Access Point
LMSAP	LLC layer Management Service Access Point
MAC	Medium Access Control
MIMO	Multiple Input Multiple Output
MISO	Multiple Input Single Output
MLSAP	MAC Layer Service Access Point
MMSAP	MAC layer Management Service Access Point
MU-MIMO	Multi User MIMO
N3IWF	Non-3GPP InterWorking Function
NA	Node of Attachment
NMS	Network Management System
OFDM	Orthogonal Frequency Division Multiplex
OFE	Optical Front End
OSI	Open System Interconnection
OWC	Optical Wireless Communication
PHY	Physical
PLC	Power Line Communications
PLSAP	PHY Layer Service Access Point
PMSAP	PHY layer Management Service Access Point
POF	Plastic Optical Fiber
QoS	Quality of Service
RFE	Radio Front End
RF	Radio Frequency
SAP	Service Access Point
SIMO	Single Input Multiple Output
SISO	Single Input Single Output
SMF	Session Management Function
SMSAP	System Management Service Access Point
STA	Station



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

SU-MIMO	Single User MIMO
TEC	Terminal Control
UE	User Equipment
UPF	User Plane Function
USB	Universal Serial Bus
Wi-Fi	Wireless Fidelity



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

Content

1.	Introduction	8
2.	Scope and purpose of this document	8
2.1.	Scope	8
2.2.	Purpose	9
3.	Use cases and functional requirements	9
3.1.	Office	9
3.1.1.	Functional characterization	9
3.1.2.	System architecture overview	9
3.1.3.	LiFi functional requirements	10
3.2.	Consumer home	13
3.2.1.	Functional characterization	13
3.2.2.	System architecture overview	14
3.2.3.	LiFi functional requirements	14
3.3.	Fixed Wireless Access	16
3.3.1.	Functional characterization	16
3.3.2.	System architecture overview	16
3.3.3.	LiFi FWA functional requirements	17
3.4.	Further use cases	18
4.	LiFi open reference architecture	18
4.1.	Overview	18
4.1.1.	Scope of reference architecture	18
4.1.2.	Basic terminology	19
4.1.3.	Mobility terminology	19
4.2.	Basic reference architecture	21
4.3.	Core functional entities	21
4.3.1.	Functional entities of LiFi interface	22
4.3.2.	Communication with peer entities through layered header information	23
4.4.	Interfaces and reference points	23
4.4.1.	Internal reference points (informative)	24
4.4.2.	Open interfaces	26
4.5.	Extensions	27
4.5.1.	Introduction	27



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

4.5.2.	Access Point	28
4.5.3.	Open fronthaul.....	30
4.5.4.	MIMO	31
4.5.5.	Positioning.....	35
4.6.	Comprehensive reference architecture	35
4.7.	Open issues	35
5.	Relation to standards-specific reference architectures.....	36
5.1.	Terminology mapping	36
5.2.	Relation to IEEE 802.11 reference model	36
5.3.	Relation to IEEE 802.15.13 reference architecture.....	38
5.4.	Relation to ITU-T G.9991 reference architecture	39
5.4.1.	Datapath	39
5.4.2.	Interfaces	40
5.4.3.	Management entity	41
6.	Integration with network reference architectures	41
6.1.	Integration of LiFi within IEEE 802.11CF	41
6.2.	Integration of LiFi within TS 23.501	42
7.	Reference model software.....	43
8.	Conclusion and outlook	43
	References	45
	List of figures.....	46
	List of tables	47



1. Introduction

Light communication or LiFi, as it is often called, is an emerging technology that provides unique features through the usage of the enormous amount of spectrum of light. It delivers clear benefits for the realization of reliable wireless high-speed communications and has broad applicability to many different use cases through its usage of unlicensed spectrum and wide scalability from low power small bandwidth to extreme mobile broadband and ultra-reliable low latency communications.

As there is not the single extreme high-volume compelling use case ('killer application') but a variety of beneficial deployments of moderate market volume each, functional similarities among the use cases must be identified to allow for the definition of common building blocks for the design of the light communication interface circuitry as prerequisite for chip designs that are able to serve a wide variety of use cases and finally reach the economy of scale necessary for successful market introduction. As applications are evolving over time and new deployments may be identified while gaining application experience, there is need for flexibility and extensibility of the architectural approaches to cope with future demand. A common open reference architecture for the LiFi interface is seen as a beneficial tool to foster the broad market introduction of light communication technologies.

This document aims to fill the gap and to provide an initial proposal for an open reference architecture, which will be revised and refined during the ELIOT project based on the experiences gained in the development tasks of the various demonstration cases.

Following a brief presentation of the guiding use cases and their functional requirements for the LiFi interface in chapter 3, the LiFi open reference architecture is derived and developed in chapter 4 following common principles of open system interconnection design. Internal as well as open external interfaces of the LiFi interface are introduced, and various optional extensions for specific functional requirements are proposed. Chapter 5 shows the alignment of the proposed open reference architecture with existing light communication interface designs and developments, and chapter 6 addresses the deployment of the specified LiFi interface within the most widely deployed network architectures. Chapter 7 is the provisional placeholder for the description of the reference model software library, that will be added in the final version of this document. Potential and planned directions for amendments to this document are provided in chapter 4.7 as well as in the concluding chapter 8.

2. Scope and purpose of this document

2.1. Scope

This document defines a generic open reference architecture of PHY layer and DL layer functions of a LiFi communication interface together with system management functions for the interface as well as the adaptation layer to various network layer protocols in the data path. Optional extensions to the open reference architecture are proposed for representation of advanced features like fronthaul, MIMO, or positioning.



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

2.2. Purpose

This document facilitates standardized interfaces for LiFi communication to allow for easier deployment and adoption of the technology to a broad variety of use cases, to enable synergies in the design and development of circuitry and driver software, and to foster the market availability of interoperable chip solutions.

3. Use cases and functional requirements

3.1. Office

3.1.1. Functional characterization

In a typical office building an enterprise network solution provides internet connectivity via Wi-Fi and LiFi. RF spectrum can be relieved and new applications can be allowed (e.g. wireless screen sharing) by deploying LiFi as a capacity booster next to Wi-Fi. State of the art secure individual authentication and encryption over the air are required.

The LiFi integrated luminaires are used to offload traffic from Wi-Fi (and potentially 5G) towards the unregulated light spectrum offering improved bandwidth and dependable quality of service. As LiFi is not trespassing building walls, interference is limited to the single room and network intrusion is hampered.

The typical locations to provide LiFi connectivity are offices and meeting rooms where most terminal connections are to stationary locations (e.g. on the table) and end devices are essentially not moving. Still it is required to support connectivity for moving end-user devices. A ‘multi-cell’ infrastructure will be realized for seamless connectivity across the office area to serve moving LiFi devices. A coordinator manages multi access point connections.

Office spaces have potentially a high density of devices to connect. MIMO solutions will be used in ELIOT mostly for improved ruggedness of the connection. The wired broadband backhauling will be realized by Ethernet preferably using an existing infrastructure. The fronthaul deployment towards the optical front ends through POF will be assessed as alternative to the wired connection used so far.

At least 50 Mbit/s uplink and downlink speed are required for each user at 99.9% of time to serve any modern office application. Typical business traffic includes Internet browsing, remote desktop sharing and server usage, file download, teleconferencing, etc.

3.1.2. System architecture overview

The general architecture for the office use case is depicted below where AP stands for access point and OFE for optical front end.



This project has received funding from the European Union’s Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

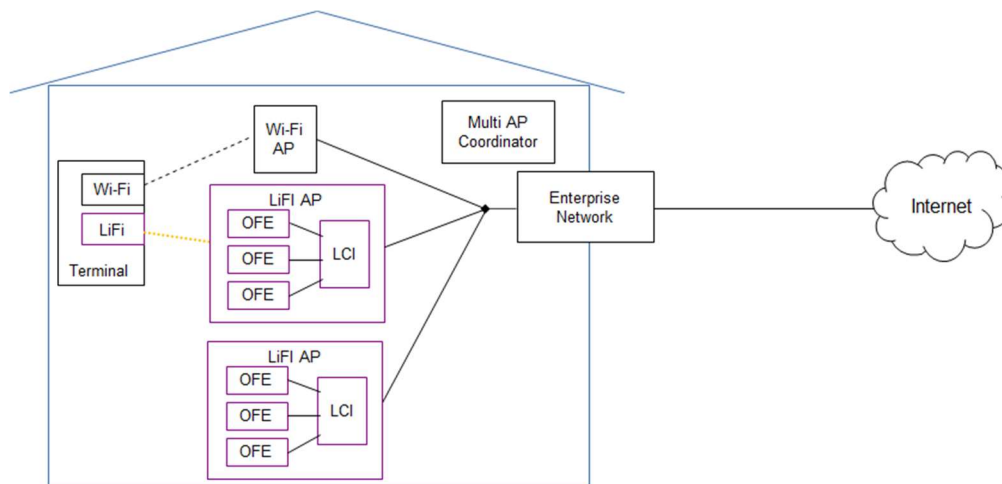


Figure 1: Office – system architecture overview

3.1.3. LiFi functional requirements

Seamless large area coverage through multiple LiFi APs has to be provided together with low power consumption and low-cost terminal interfaces. Management and service of the LiFi network components needs to be fully integrated with corporate IT.

Support of various moving terminal scenarios is required:

Terminal moving within the coverage area of a single AP

In this scenario, a single LiFi-AP comprising multiple OFEs, provides LiFi access within a single area (e.g. a single room). It is thereby assumed that no other LiFi-AP is visible within that area, meaning that no interference occurs through other APs.

To establish a robust LiFi connection, the LiFi-AP may activate multiple OFEs for each terminal. It enables to keep the connection alive when line-of-sight blocking towards a single OFE occurs. Moreover, when the terminal moves (changing its location in the area or changes its angular orientation towards the OFEs), the connection can also be kept alive.

The LiFi-AP and terminal may further optimize the link performance by taking advantage of the light traveling over different paths.

The LiFi-AP can trade-off between robustness and power consumption. For maximum robustness, the AP may activate all its OFEs for a terminal. For minimum power consumption, the AP may activate a single OFE for a terminal.

If a terminal moves within the coverage area of the LiFi-AP, the latter can adapt the connection to the terminal by changing the selection of active OFEs for this terminal and by adapting the physical layer parameters (e.g. bit loading) for optimal link quality.



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

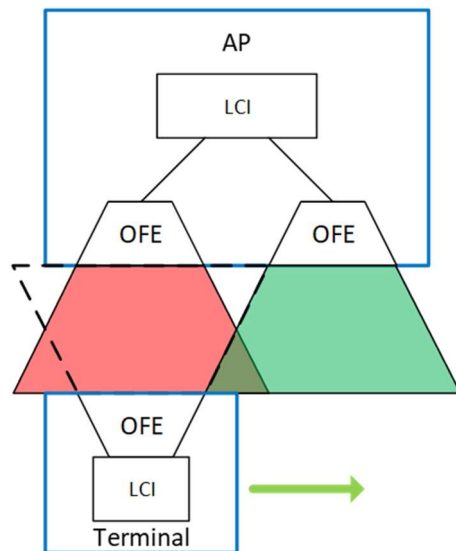


Figure 2: Terminal moving within LiFi AP coverage area

Terminal moving between APs with isolated coverage areas

In this scenario, multiple areas are served by LiFi-APs, whereby these areas are optically separated. This is typically the case for the situation of multiple (small) rooms in a building. Each area is thereby covered by a single LiFi-AP and no interference occurs between these APs. For a moving terminal within one of these areas, the previous scenario applies. If a user moves its terminal from one area to another, he/she typically enters an intermediate area (e.g. corridor) where LiFi has no coverage, resulting the terminal to lose its LiFi connection. As soon as the terminal occurs in an area with LiFi coverage, it can re-connect via its LiFi interface. Such re-connection should be fast.

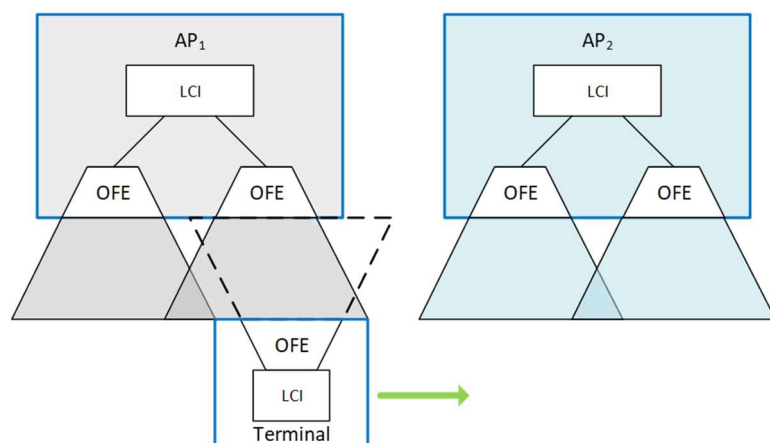


Figure 3: Terminal moving between LiFi APs with isolated coverage areas

Terminal moving between APs with overlapping coverage areas

In this scenario, a (large) area (e.g. open office) is served by multiple LiFi-APs with each AP covering part of the total area. The APs are optically not isolated as in the previous scenario. Instead they intentionally have overlapping coverage areas to prevent dead zones. A terminal may therefore reside in the coverage area of multiple APs. It means that situations of unwanted interference can occur, which can be solved by coordinating the APs.

For a terminal moving from one AP to a next AP, this scenario has similarity with Wi-Fi, meaning that a terminal can initiate handover from one AP to a next overlapping AP. This could be a “break before make” handover, whereby the LiFi link is briefly lost, but most preferably a “make before break” handover is supported in order to keep breaks of the LiFi link short.

LiFi differs from Wi-Fi regarding the size of overlapping coverage and the line-of-sight behaviour of LiFi.

Typically, the overlapping coverage area of LiFi is much smaller than for Wi-Fi at 2.4 or 5GHz, which puts an extra requirement on the speed of the handover process. A terminal may therefore preferably anticipate a handover by pre-registering to a neighbouring AP and pre-establishing security keys via the current active connection and the backhaul.

The line-of-sight behaviour of LiFi requires extra attention for the interference handling. A terminal has typically only a field-of-view (FOV) towards one or multiple APs, but not to any other terminal. An AP has typically only a FOV towards one or multiple terminals, but not to any other AP. It means that the carrier sensing of CSMA cannot be applied to prevent APs or terminals accessing the LiFi medium at the same time. Hence, access to the LiFi medium requires a more coordinated approach compared to Wi-Fi. For LiFi, it is therefore preferred that an AP controls the access of the terminals to the LiFi medium for uplink (terminal to AP) communication and that APs are coordinated to control their access to the medium.

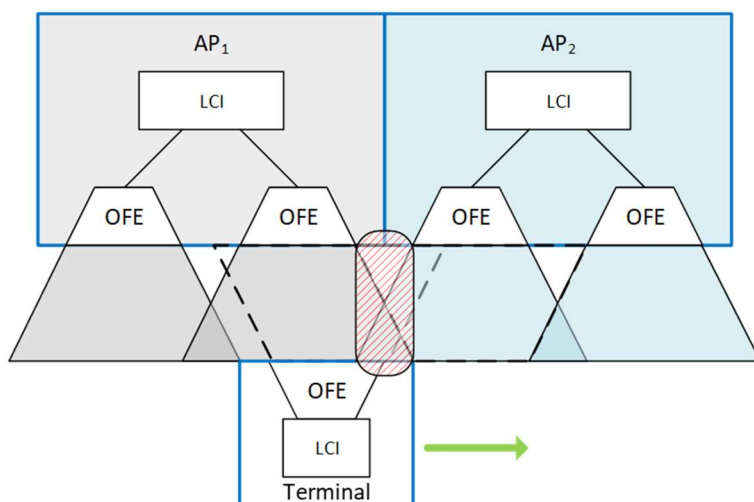


Figure 4: Terminal moving between LiFi APs with overlapping coverage areas

Terminal moving in/out of LiFi area within a Wi-Fi area

In this scenario, a small area (e.g. a single room) is served by a LiFi AP and a larger area (e.g. multiple rooms) by a Wi-Fi AP. For a terminal that moves in/out of the LiFi area, vertical handover between LiFi and Wi-Fi should take place. For a terminal that moves into a LiFi area, it enables to off-load traffic from Wi-Fi and to provide an increased QoS. For a terminal that moves out of a LiFi area, it enables to restore or keep the connection to the network through Wi-Fi. Figure 5: Terminal moving out of LiFi coverage area, remaining in Wi-Fi coverage area (different APs) illustrates this scenario for two physically separated APs and Figure 6 illustrates this scenario with a multi-protocol AP. Referring to



IEEE802.11, this corresponds to fast BSS transition and fast session transfer, respectively. Note another way to realize the integration of LiFi and Wi-Fi is, by using the IEEE 1905.1 protocol and maintain layer 2 connectivity. This allows using two wireless techniques in parallel.

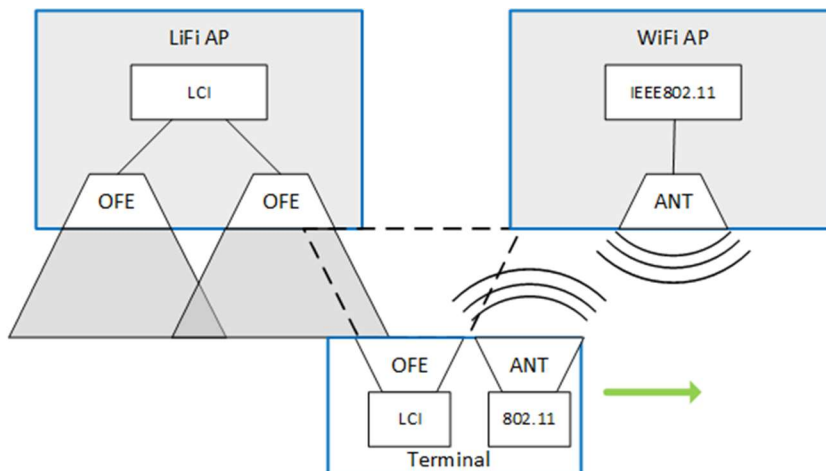


Figure 5: Terminal moving out of LiFi coverage area, remaining in Wi-Fi coverage area (different APs)

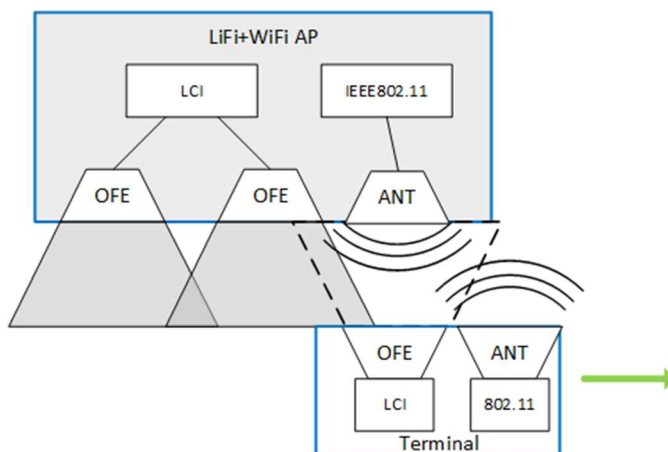


Figure 6: Terminal moving out of LiFi coverage area, remains in Wi-Fi coverage area (single AP)

3.2. Consumer home

3.2.1. Functional characterization

The consumer home use case envisions a seamless synergy between the well-established Wi-Fi usage by consumers and new LiFi hotspots for specific needs. These hotspots are spread across the house on places with a need for a stable high throughput connection such as the living room area, home office space or the backyard garden. They enable to offload traffic from Wi-Fi to LiFi in particular places of need but still have the freedom to move around independent of carrier technology.

Whereas Wi-Fi has the mesh functionality to form its own backbone connectivity between access points, LiFi has its own need for a separate infrastructure to connect the different access points to a central controller. For the consumer case the central controller should be the one appliance which is able to handle Wi-Fi, LiFi as well as acts as the home gateway router to your internet service provider.



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

The luminaires have to be small, cheap as well as easy to install, replace and maintain. The infrared beams from the ceiling unit should cover an area of at least 2x2 m² in which the customer can deploy the terminal and still have a degree of freedom for proper placement of the transceiver. In case of nomadic or mobile user devices a single hotspot should be able to concurrently support several connections for the multiple users in a household.

LiFi enables typical residential traffic such as home networking, Internet browsing on desktop, tablets, smartphones etcetera but also novel applications as virtual reality entertainment, very high definition television and live game streaming services.

3.2.2. System architecture overview

Figure 7 shows an architecture overview of the consumer use case. The internet service provider is connected to the home gateway/router which has the functionality to handle the Wi-Fi as well as the LiFi connectivity.

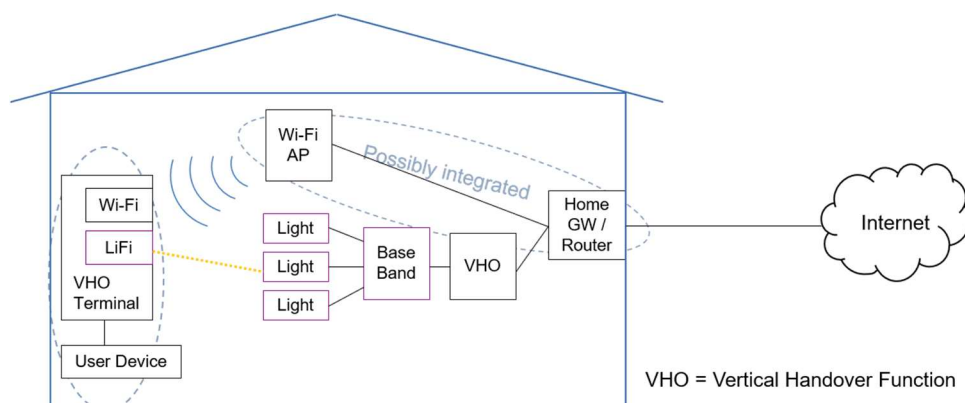


Figure 7: System architecture overview of consumer home use case

3.2.3. LiFi functional requirements

To transport the data traffic from the central home gateway through the house to the LiFi hotspots some sort of infrastructure is needed. Hence, the main two options considered are:

Power-line Communication (PLC)

Reuse the existing copper cabling is possible by applying PLC technology from the home gateway to each luminaire, see Figure 8: Connection of the home gateway to LiFi hotspots using power line communications. This would enable easy installation for the consumer where the data is modulated centrally on the mains group and can be converted back to the LiFi AP anywhere in the house. PLC conversion would be done once centrally and at each LiFi hotspot attached to the mains group. The limitation with this approach is that backhaul capacity is shared for all luminaires.



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

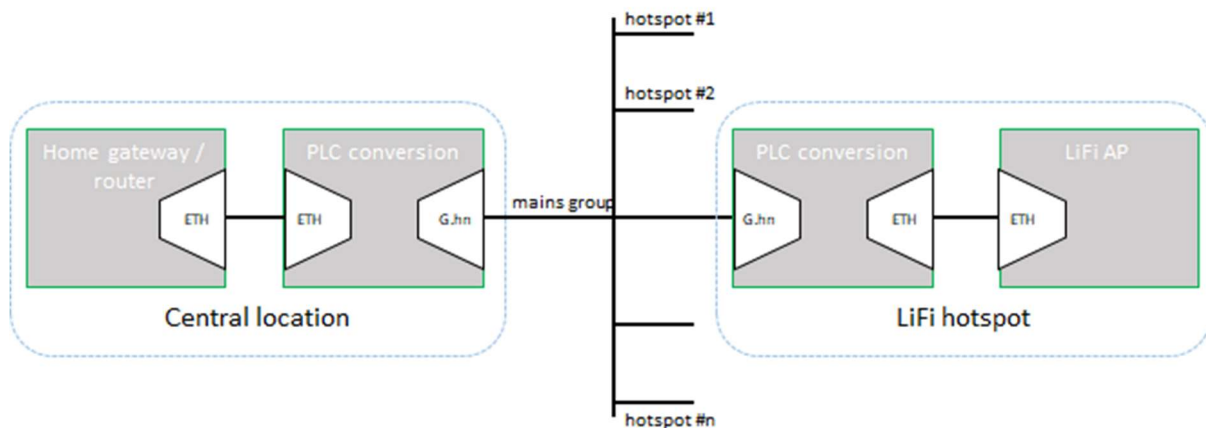


Figure 8: Connection of the home gateway to LiFi hotspots using power line communications

Plastic optical fiber (POF)

Consumers or skilled workers should be able to easily install new POF cabling through the duct leading to the central location where the home gateway is situated, see Figure 9: Connection of the home gateway to LiFi hotspots using plastic optical fiber. The splitting and combining of fibers should also take place here so it can be connected to the home gateway. In this situation each LiFi hotspot would get its own cabling and POF conversion from the AP to the home gateway. Recent tests indicated that the POF link can cover Gbit/s data rates, i.e. the limitation is always the wireless link, not the backhaul what is an advantage over powerline. Same as for powerline, there might be an intention to share the POF infrastructure which is possible using wavelength division multiplexing (WDM) but leads to higher complexity and cost.

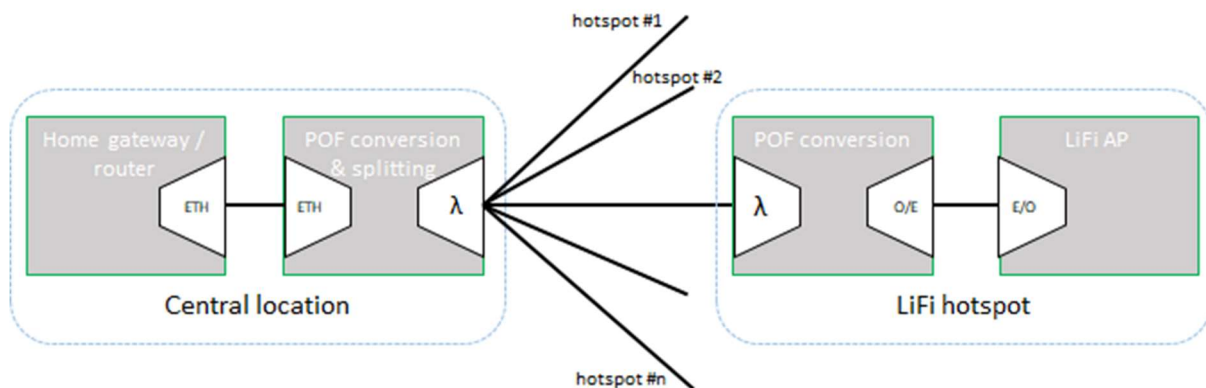


Figure 9: Connection of the home gateway to LiFi hotspots using plastic optical fiber

When both the Wi-Fi coverage and the LiFi hotspots are in place one needs to be able to switch the IP forwarding traffic with aggregation/vertical handover between the two techniques. This is similar as explained in the previous use case. From the end user perspective, the initial onboarding procedure is simple and almost effortless but with strong security. Afterwards, the handover decision-making and procedure is an automatic process which is centrally controlled so it does not require the end user to pay attention to it. The user terminal should be a low-power, low-cost device with standard interface such as USB or ETH.

3.3. Fixed Wireless Access

3.3.1. Functional characterization

The Fixed Wireless Access (FWA) use case complements the Consumer Home use case, providing the interconnection between the Home Gateway Router and the Internet (Figure 10)

FWA using Optical Wireless Communication (OWC) links is used to provide wireless data connectivity up to at least 200 meters between a service provider network and one or more dwelling units of customers, in order to replace more cost intensive cable based digital subscriber lines.

Such OWC systems need to have line of sight (LoS) conditions between the LiFi Subscriber Line Access Multiplexer (LSLAM) at the network side and LiFi Modem at the customer site, establishing the data connection, similar to respective radio or THz links.

On one hand side, optical based wireless connection may be in competition to millimeter- or THz-wave based wireless access technologies, but on the other hand it also can be a good complimentary technology with respect to bad weather conditions. If the performance of mm-wave systems decreases, then the performance of OWC-systems increases, and vice versa, at distinct weather conditions. Hence, both OWC- and mm-wave hybrid systems together offer a better overall connectivity performance. Therefore, OWC outdoor links are good candidates for hybrid FWA systems, complementing e.g. mm- or THz-wave systems.

OWC links have to perform broadband > 1 Gbit/s signals and reliable connectivity to the customers. An automated link establishment to enable zero touch provisioning and using unlicensed light spectrum reduces time and costs for setting-up the customer connectivity services. However, it also has to smoothly fit into the overall landscape of a town, not disturbing the aesthetic view of city planning authorities. Therefore, the OWC devices have to be small, well designed with low power consumption, and ease of implementation.

3.3.2. System architecture overview

Figure 10 shows the architecture of an FWA system, depicting the network side with a Communication Service Provider for Internet connectivity and a LSLAM, e.g. mounted at a light pole. It offers the opportunity to get power as well as data connectivity in city areas via existing duct systems, reducing the costs for providing an OWC based provider network. A LSLAM contains multiple LiFi units which are connected via point-to-point or point-to-multipoint links to different LiFi modems of diverse customers, providing broadband Internet connectivity services with > 1 Gbit/s link capacities.



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

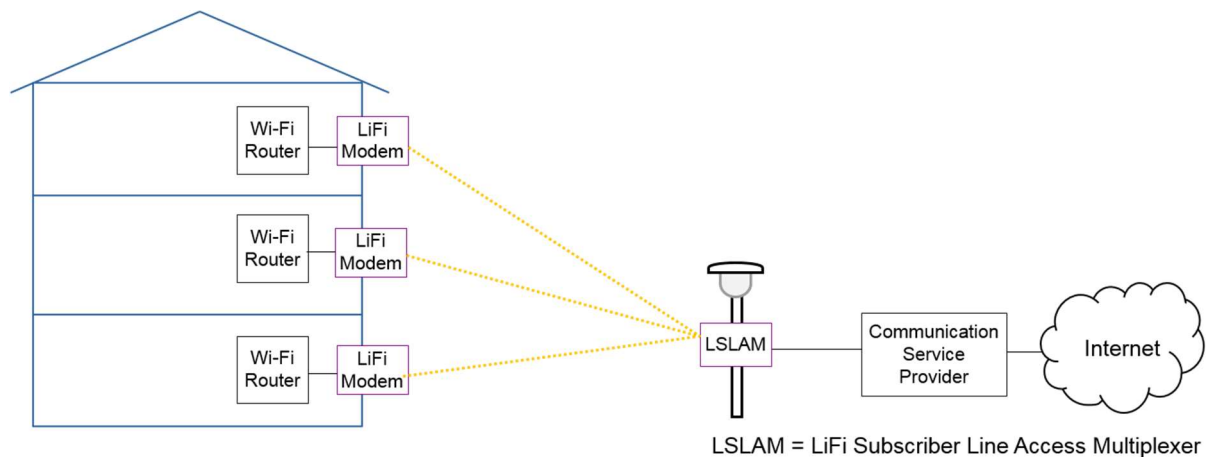


Figure 10: System architecture of FWA use case

The provision of typical broadband access services like Internet Protocol Television (IPTV), high speed Internet connectivity, and voice services may become more important by an increased use of teleconferencing and homeworking activities enabled also due to the Corona virus. Thus Gbit/s connectivity services using OWC are good candidates for FWA systems if they offer cost efficient higher link capacities or can complement competitive systems.

However, the classification and prioritization with at least 4 service classes may be useful for future LiFi systems, supporting sensitive real time services like teleconferencing, voice, and gaming.

Since LoS is essential for focused light beams of the FWA set-up, especially at longer distances beam steering systems may be relevant for future OWC systems.

A dual homing connectivity via e.g. two OWC systems from different light poles may also increase the bandwidth and reliability of future LiFi Digital Subscriber Lines, also supporting protection switching mechanisms if one connection fails.

Furthermore, a remote management including configuration, fault monitoring, and alarming are necessary functionalities to increase the availability of the OWC links, and in case of a failure of the time to service.

Finally, encryption functionalities have to be included to provide secure transmissions of sensitive customer data.

3.3.3. LiFi FWA functional requirements

The LiFi functional requirements are summarized for the FWA via OWC links.

- Transparent layer-2 connection
- Point-to-(multi)point connectivity
- Data rate of 1-2 Gbits/s per link
- Tx-Rx distances of 200 meters or longer
- Traffic classification and prioritization with 4 service classes or more
- Automated link establishment to enable zero touch provisioning
- Remote management including monitoring, configuration, alarming



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

- Link protection mechanism in order to meet the requirement similar to DSL/FTTH
- Link encryption on the wireless link
- Low power consumption
- Small and smoothly designed OWC devices fitting into the city view

3.4. Further use cases

Additional use cases, e.g. industrial positioning and mesh communications, digital life door lock, and digital signage are considered in the project and will be added in the final version of the Open Reference Architecture (D3.3).

4. LiFi open reference architecture


4.1. Overview

The LiFi open reference architecture will be introduced in this chapter in a structured stepwise approach. After defining the scope of the LiFi open reference architecture within the common end-to-end data communication infrastructure, and introducing the basic terminology used for the description, a basic model with functional entities, and interfaces and reference points will be presented. Subsequent the basic model is extended for additional functions like access point functionality, fronthaul, and MIMO. Putting the pieces together in a comprehensive reference architecture concludes the chapter.

4.1.1. Scope of reference architecture

Various reference architectures exist in communications. The LiFi open reference architecture is aimed for providing a common model for the specific part in the overall end-to-end communication architecture that the deployment of LiFi as over-the-air interface introduces between the terminal at the user side and the access network on the infrastructure side.

Use case scenario

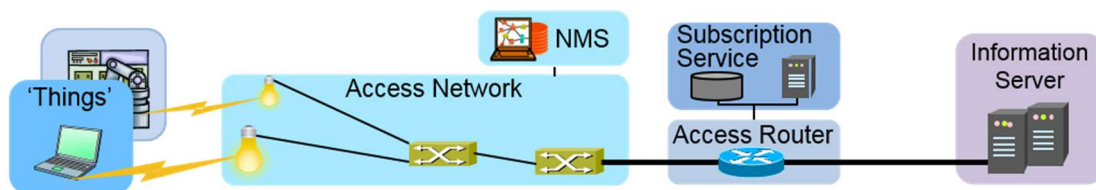

Open Reference Architecture provides more functional details of LiFi interface

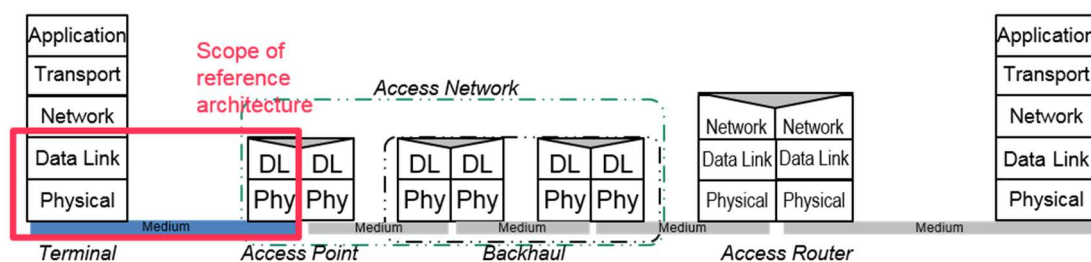


Figure 11: Scope of reference architecture in end-to-end communication architecture



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

The scope of the LiFi open reference architecture is depicted in the Figure 11 above. As indicated through the red rectangle, usage of light instead of radio waves for the link over the air impacts the PHY and the Data Link layer at both, the terminal and the access point. LiFi can completely replace radio communication interfaces, and the replacement mostly doesn't cause any changes in the rest of the communication architecture except some parameters in the network configuration and management system (NMS).

4.1.2. Basic terminology

The following terminology is applied for the specification of the LiFi open reference architecture and the description of the various extensions and application scenarios:

- Terminal
 - It denotes the entity containing the endpoint of communication towards the user
- Access Point
 - It denotes the entity that provides wireless communication to one or more terminals incorporating at least one LiFi interface
- LiFi interface
 - It denotes the PHY and DL layer functionalities that are required to realize communication over light
 - A LiFi interface consists of
 - Data Link layer
 - One Modem that executes the signal processing functions required for the PHY
 - One or more Optical Front End (OFE)
- Optical Front End
 - Part of the LiFi interface that converts (digital or analogue) electrical signals into optical signals
- Fronthaul
 - It denotes a communication system connecting distributed OFEs with the Modem.

4.1.3. Mobility terminology

To maintain connectivity while moving terminals across areas covered by wireless access networks the terminal must dynamically change its point of attachment potentially even through changing the network interface used for communication.



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

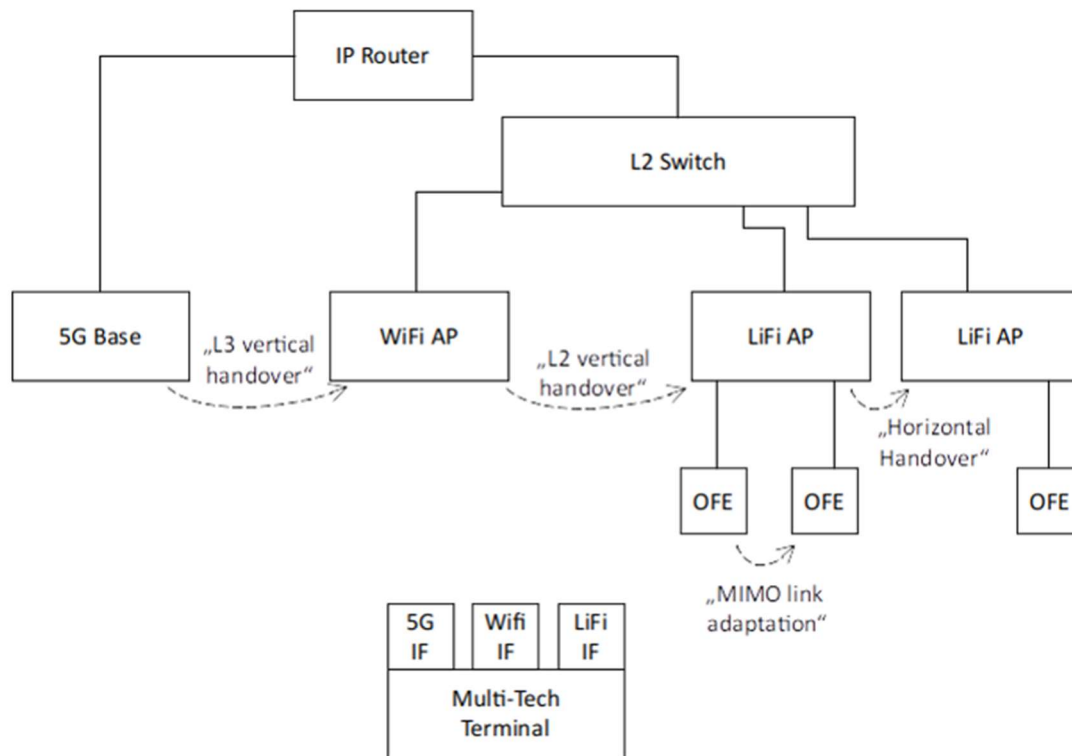


Figure 12: Mobility scenarios

Depending on the network arrangements various transition schemes between nodes of attachment to the access infrastructure could happen as depicted in the Figure 12 above. The table below lists and explains the terms used to denote the various schemes.

Term	Description / definition
Vertical L3 handover	The routine facilitated to move IP-level connectivity of a terminal between a completely different access technology and a LiFi network. The terminal's IP address might be preserved.
Vertical L2 handover	The routine facilitated to move layer 2 connectivity between a Wi-Fi network and a LiFi network. The terminal's MAC address is preserved.
Horizontal handover	The transfer of association state between two neighboring, possibly coordinated, APs. This is independent of the interference coordination facilitated between the APs.
MIMO link adaptation	The (antenna selection / MIMO scheduling / ...) of a single AP with multiple optical frontends to aid a terminal's mobility. All association state remains in the AP.

Table 1: Mobility terminology

Orthogonal to the list of transition schemes listed above is the distinction between hard handover and soft handover:

- Hard handover, aka 'break-before-make'
 - The connection between the terminal and the serving access point is teared down before the (re-)establishment of the connection to the target access point. It usually causes longer periods of interruptions of the connectivity



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

- Soft handover, aka 'make-before-break'
 - The terminal establishes the connection to the target access point before tearing down the connection to the serving access point. Considerably shorter interruptions result from soft handover but require more complex signalling schemes at the terminal and the access network, as both the network as well as the terminal must be capable to handle two session contexts.

Note: Due to its seamless nature, MIMO link adaptation is often considered as a kind of soft handover. Effectively, it does not require two session contexts, as the transition is accomplished by MIMO functions in the PHY without impact to the session state maintained in the Data Link layer.

4.2. Basic reference architecture

The basic reference architecture model is depicted below. It is closely aligned with the common layered ISO-OSI open systems interconnection model [1] that established the basic architectural model of all modern communication systems.

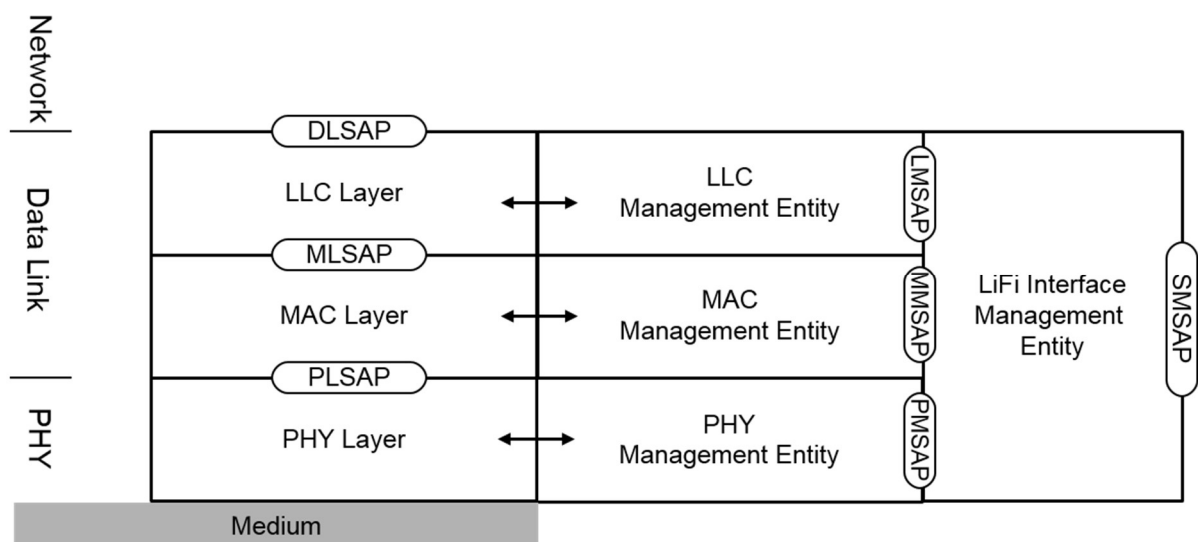


Figure 13: Basic reference architecture

The reference architecture covers the Data Link layer and the PHY layer of the open system interconnection model. The Data Link layer model is divided into sublayers comprising the medium specific functions in the MAC layer, and the link control functions in the LLC layer.

All layers have their related management entities and overall coordination and control across all layers is performed through the LiFi interface Management Entity that provides the service access point for the control of the LiFi interface through external control and management entities.

4.3. Core functional entities

The functional behaviour of the LiFi interface is structured through three functional layers, each with its own management entity and a common system management entity that provides a common external management interface and control across the three layers. Each layer does not only communicate locally with its management entity, but also exchanges control and management information with its peer through layer-specific header information.



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

4.3.1. Functional entities of LiFi interface

The LiFi open reference architecture comprises the following functional entities:

- PHY (Physical) layer
 - The PHY layer comprises the functions to encode and modulate protocol data units delivered by the MAC layer into a stream of physical signals for transmission over the medium, as well as the functions to demodulate and to decode physical signals received over the medium and to forward the reconstructed data frames into the MAC layer for further processing.
 - Depending of the procedures for controlling the access to the medium, the PHY can also perform sensing of the medium to detect clear channel conditions.
- PHY management entity
 - The companion entity to the PHY layer comprises the management functions to tune behaviour and parameters of PHY layer in order to increase performance and efficiency of the coding and modulation process.
 - It provides services for PHY layer configuration and monitoring to the LiFi interface Management Entity.
- MAC (Medium Access Control) layer
 - The MAC layer comprises the functions to control and perform the transmission of higher layer protocol data units over a shared medium.
 - It contains the basic access mechanisms to coordinate and control the access to a shared medium; provides the capabilities for fragmentation, reassembly and retransmission of user data into entities suited for transmission over the medium, and it performs the ciphering algorithms so enable secure transmissions over a shared medium.
- MAC management entity
 - The companion entity to the MAC layer comprises the management functions to establish and maintain the MAC operations.
 - It provides functions to establish synchronization among units sharing the same medium, to perform power management through identification of idle periods and hibernation of power consuming processing functions, to pursue scanning processes in the medium to learn about usage and potential peer partners, to establish, maintain, and teardown associations with peer partners, and to provide capabilities for external MAC configuration and monitoring of the MAC layer.
- LLC (Logical Link Control) layer
 - The LLC layer comprises the functions to perform secure and authenticated forwarding of network layer protocol data units across established communications links provided by the MAC layer.
 - It contains the port access entity controlled through the authentication process that securely gates that data exchange to the peer device and the protocol discrimination and encapsulation functions to allow multiplexing control as well as various higher layer protocols on the communication link established with the peer entity.
- LLC management entity



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

- The companion entity to the LLC layer comprises the management functions for the establishment and maintenance of secured and authenticated links with peer communication partners.
- It executes the authentication procedures and takes care for the management of the encryption keys, which are applied through the ciphering function in the MAC layer.
- LiFi interface management entity
 - The LiFi interface management entity covers the system management functions of the whole LiFi interface and interacts with the PHY management entity, the MAC management entity, and the LLC management entity to operate the LiFi interface for transmission of user data through light to another device.
 - In addition to initiation and configuration of the whole system, it provides monitoring data of the various layers to an external network management system.

4.3.2. Communication with peer entities through layered header information

Each layer communicates with its peer entity through information that is prepended to the layer's service data unit and forwarded as protocol data unit to the lower layer for transmission over the medium.

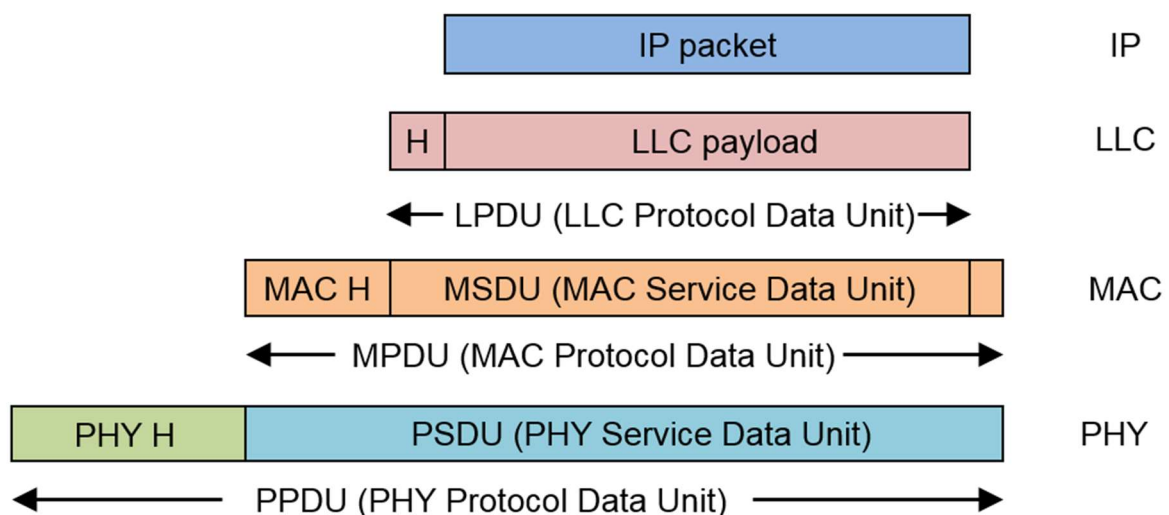


Figure 14: Protocol data unit concatenation through successive preceding of header information

The Figure 14 shows the concatenation of the PHY protocol data unit that is transmitted over the medium through prepending header information of each of the layers of the reference architecture. Depending of the actual implementation of the PHY, the PHY layer may be divided into a PHY convergence sublayer and a PHY layer to enable easier adoption of different coding and modulation techniques within a single system design.

4.4. Interfaces and reference points

Communication of user data through light communications from one peer to another peer is performed by cooperation of the entities of the open reference architecture across interfaces between the entities. These interfaces are denoted as reference points, or service access points.

The Figure 15 depicts all reference points that are usually defined in LiFi interface specifications. The interface between the LLC Layer and LLC Management Entity, as well as the MAC Layer and the MAC



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

Management Entity, and the PHY Layer and the PHY Management Entity are only indicated by arrows below, but are not explicitly denoted, as they are usually kept implementation specific and are not detailed in communication interface standards. Similar, the interface between PHY Layer entity and MAC Layer entity is not exposed below, as the two functional entities are highly integrated with each other in modern system designs to enable performant and cost-effective implementations.

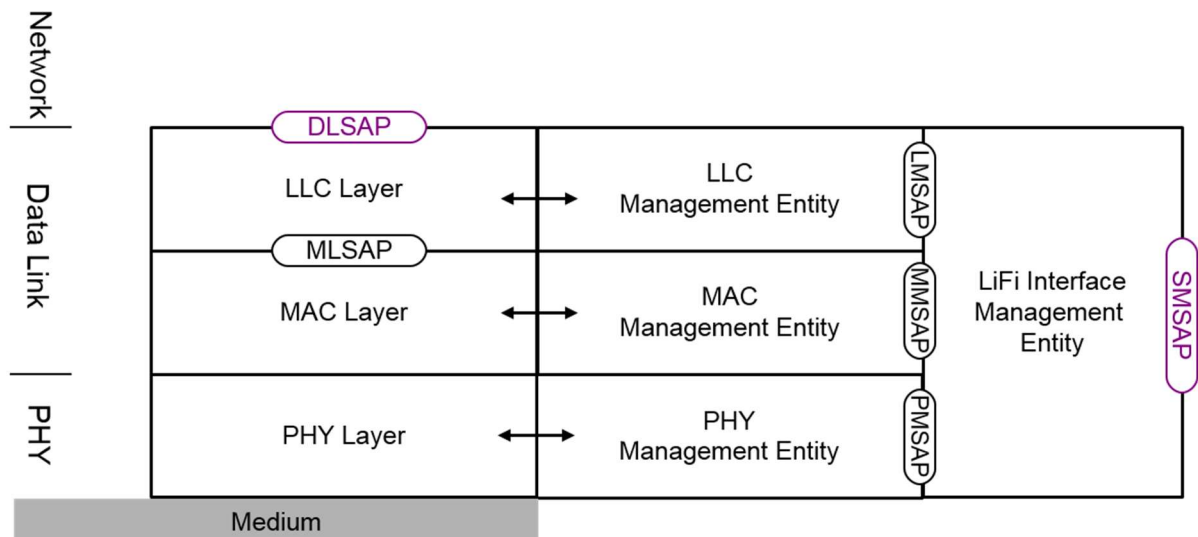


Figure 15: Open interfaces in reference architecture model

Out of the six denoted reference points of the LiFi open reference architecture, four reference points are internal to the LiFi interface and mostly important only to the chip implementers of a LiFi interface standard. There is no need to establish open reference points for these internal interfaces, but informative descriptions of the usual functions provided is helpful for better understanding of the behaviour of different solutions of LiFi interfaces.

The two external reference points DLSAP, and SMSAP are highlighted through purple colour as they are important to system developers and integrators, who deploy LiFi technologies in their system implementations. Open specifications of the external reference points foster interoperable LiFi interface specification and facilitate easy adoption of LiFi to system designs, as system integrators can choose among the most appropriate LiFi interface designs without expensive adaptations of the end-to-end systems.

4.4.1. Internal reference points (informative)

The MLSAP in the datapath, as well as the management interfaces PMSAP, MMSAP, and LMSAP are internal interfaces of the LiFi open reference architecture. The list below provides some information about the nature and exemplary functions of these interfaces.

- MLSAP (MAC Layer Service Access Point)
 - MAC layer data interface towards the Logical Link Control layer for retrieving and forwarding MSDU.
 - Usual functions provided by this SAP:
 - Forwarding of transmission frames downstream
 - MA-UNITDATA_request/_confirm



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

- Forwarding of transmission frames upstream
 - MA-UNITDATA_indication
- PMSAP (PHY layer Management Service Access Point)
 - Layer management interface for PHY layer functions
 - Usual functions provided by this SAP:
 - Reset of the PHY layer configuration and state to default
 - PM-RESET_request
 - Configuration of operational parameters of PHY layer
 - PM-ATTRIBUTE_request/_confirm
- MMSAP (MAC layer Management Service Access Point)
 - Layer management interface for MAC layer functions
 - Usual functions provided by this SAP:
 - Reset of the MAC layer configuration and state to default
 - MM-RESET_request/_confirm
 - Configuration of operational parameters of MAC layer
 - MM-ATTRIBUTE_request/_confirm
 - Perform scanning procedure to detect available communication peers
 - MM-SCAN_request/_confirm
 - Establish association with communication peer
 - MM-ASSOCIATE_request/_confirm
 - Communication peer requests an association
 - MM-ASSOCIATE_indication/_response
 - Re-establish association with another peer (handover)
 - MM-REASSOCIATE_request/_confirm
 - Communication peer requests the re-establishment of an association
 - MM-REASSOCIATE_indication/_response
 - Tear down association with communication peer
 - MM-DISASSOCIATE_request/_confirm
 - Communication peer requests the termination of an association
 - MM-DISASSOCIATE_indication/_response
 - Set the ciphering key of an association
 - MM-SETKEYS_request/_confirm
 - Erase the ciphering key of an association
 - MM-DELETEKEYS_request/_confirm
 - Establish a traffic stream with QoS parameters
 - MM-ADDTS_request/_confirm
 - Communication peer requests a traffic stream with QoS parameters
 - MM-ADDTS_indication/_response
 - Tear down an established traffic stream
 - MM-DELTS_request/_confirm
 - Communication peer requests to terminate an established traffic stream
 - MM-DELTS_indication
 - Time synchronization for spatial reuse



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

- MM-TIMESYNCHRO_request/confirm
- LMSAP (Link layer Management Service Access Point)
 - Layer management interface for Logical Link Control layer functions
 - Usual functions provided by this SAP:
 - Perform EAP over LAN procedure
 - LM-EAPOL_request/_confirm
 - Initialize key renewal cycle of communication peer
 - LM_PEERKEYSTART_request

4.4.2. Open interfaces

The LiFi open reference architecture provides two open interfaces, the DLSAP for the transmission of user data frames, and the SMSAP for the system configuration, control, and management of the LiFi interface.

- DLSAP (Data Link Service Access Point)
 - Data path interface of the LiFi interface towards the network layer
 - Functions provided by this SAP:
 - Transmission of a user data frame to the communication peer
 - DL-UNITDATA_request/_confirm
 - Receipt of a user data frame from the communication peer
 - DL-UNITDATA_indication
- SMSAP (System Management Service Access Point)
 - Management and control interface of the LiFi interface
 - Functions provided by this SAP:
 - Reset the LiFi interface to default state with data path disabled
 - LFI_CMD_RESET.
 - Enable and manage LiFi physical interface
 - LFI_CMD_GET_WIPHY,
 - LFI_CMD_SET_WIPHY,
 - LFI_CMD_NEW_WIPHY,
 - LFI_CMD_DEL_WIPHY.
 - Enable and manage DLSAP interface
 - LFI_CMD_GET_INTERFACE
 - LFI_CMD_SET_INTERFACE,
 - LFI_CMD_NEW_INTERFACE,
 - LFI_CMD_DEL_INTERFACE.
 - Scan for potential communication peers
 - LFI_CMD_GET_SCAN,
 - LFI_CMD_TRIGGER_SCAN,
 - LFI_CMD_NEW_SCAN_RESULTS.
 - Connect and manage connection with communication peer
 - LFI_CMD_CONNECT,
 - LFI_CMD_ROAM,



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

- LFI_CMD_DISCONNECT.
- Authenticate and encrypt connection to communication peer
 - LFI_CMD_AUTHENTICATE,
 - LFI_CMD_DEAUTHENTICATE,
 - LFI_CMD_SET_PMKSA,
 - LFI_CMD_DEL_PMKSA,
 - LFI_CMD_FLUSH_PMKSA,
 - LFI_CMD_PMKSA_CANDIDATE.
- Set transmission class and transmit data frame
 - LFI_CMD_ADD_TX_TS,
 - LFI_CMD_DEL_TX_TS,
 - LFI_CMD_SET_QOS_MAP,
 - LFI_CMD_FRAME,
 - LFI_CMD_REGISTER_FRAME,
 - LFI_CMD_FRAME_TX_STATUS.
- Synchronization and timing
 - LFI_CMD_SET_SYNCHRO
- Vendor proprietary command
 - LFI_CMD_VENDOR.

4.5. Extensions

The LiFi open reference architecture described above is limited to simple, single input single output peer-to-peer communications over light. For the intended use cases in the domain of IoT higher requirements to the functional capabilities of LiFi interface exist.

The following subsections describe extensions to enhance the basic LiFi open reference architecture for access point operation, the deployment of fronthaul to serve widely distributed light emitters and receivers through a single processing unit, the deployment of multiple input multiple output technologies to increase throughput and coverage of a LiFi interface, and to retrieve positioning information through the LiFi interface.

Note: *As positioning through LiFi is still under investigation and development by the ELIOT project, the extension of the LiFi open reference architecture for positioning will be amended in the final version of this document.*

4.5.1. Introduction

The demanded functional extensions amend additional refinement and functional building blocks to the open reference architecture. For explanation the additional functions are shown in the data path portion of the reference architecture. Each additional function introduces amendments as well to the layer management functions and the system management interface.

Note: *Further details of the amendments to the management interfaces are still under development and will be added in the final version of the document.*



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

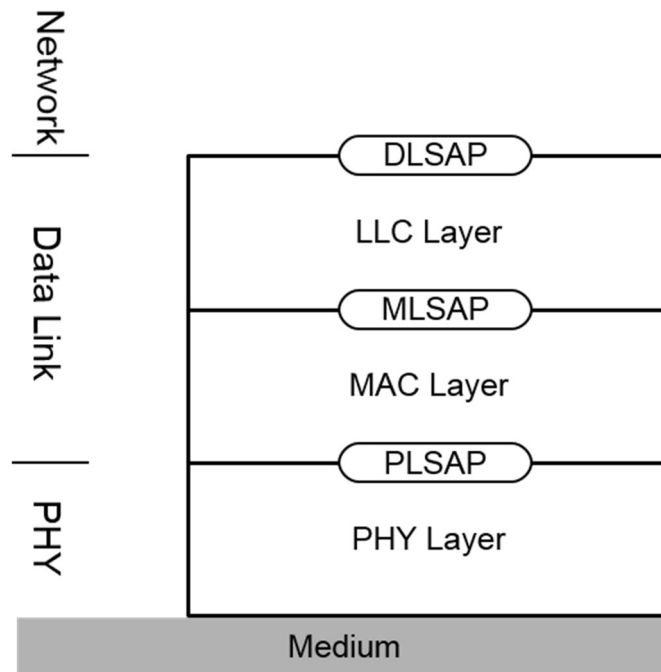


Figure 16: Datapath section of basic open reference architecture

The Figure 16 shows the datapath of the basic reference architecture. It is used in the following sections to display the various amendments to the basic reference architecture to realize the additional functions required for successful deployment of LiFi for IoT applications.

4.5.2. Access Point

Infrastructure operations of LiFi requires point of attachments to the infrastructure that can handle multiple terminal connections in parallel. For serving multiple concurrent connections through a single device the LiFi interface needs to be enhanced to maintain multiple sessions in parallel, and to forward user datagrams according to the destination address through the connection established for the related terminal. To route user data packets accordingly, a bridging function is added directly below the DLSAP leading to an LLC layer that provides a virtual port for each of the associated terminals. Such bridging function for handling multiple concurrent L2 connections is called 'portal'. Effectively, it establishes an instance of a LLSAP data path interface for each of the connected terminals.

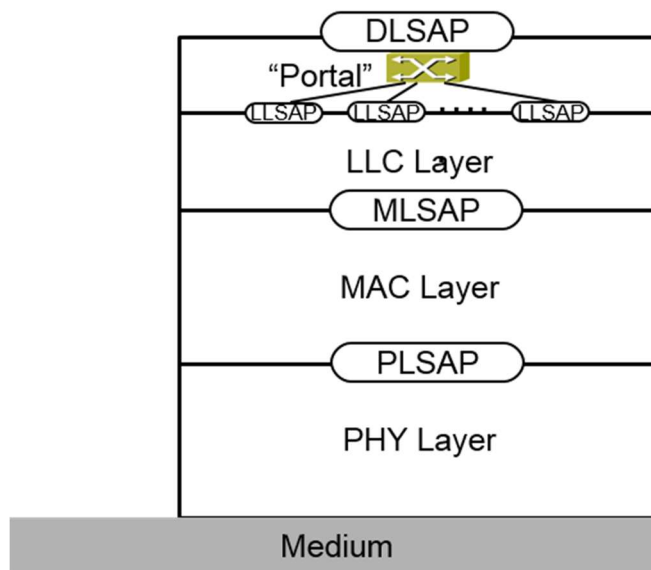


Figure 17: Link layer extensions for AP functionality

The Figure 17 depicts the amendment of the portal resulting in multiple instances of LLSAPs beneath a common DLSAP, which is able to retrieve and forward user data frames to multiple communication peers over LiFi. Forwarding can either happen according to MAC addresses (bridging) or through routing, that assigns a network layer address to each of the connected terminals.

Several additional system management commands are amended to the SMSAP interface to facilitate the external control of the AP operation.

- AP extensions to SMSAP
 - Additional commands to facilitate control of AP operation
 - Perform environmental sensing for AP configuration
 - LFI_CMD_GET_SURVEY,
 - LFI_CMD_NEW_SURVEY_RESULTS.
 - Set AP and LCS identifier
 - LFI_CMD_SET_APID.
 - LFI_CMD_SET_LCSID
 - Set AP advertisement
 - LFI_CMD_GET_APMARKER,
 - LFI_CMD_SET_APMARKER.
 - Initiate AP operation
 - LFI_CMD_START_AP,
 - LFI_CMD_STOP_AP.
 - Manage connected terminals
 - LFI_CMD_GET_TERMINAL,
 - LFI_CMD_SET_TERMINAL,
 - LFI_CMD_NEW_TERMINAL,
 - LFI_CMD_DEL_TERMINAL.
 - Manage power save operations



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

- LFI_CMD_SET_POWER_SAVE,
- LFI_CMD_GET_POWER_SAVE.

4.5.3. Open fronthaul

The PHY layer functionality can be divided into the modem part that transforms the MAC protocol data unit into a sequence of analogue or digital signals for the transmission over the medium or vice versa for the receive path, and into the Optical Front End that converts the analogue or digital output of the modem into light, or light into an analogue or digital signal for the decoding by the modem.

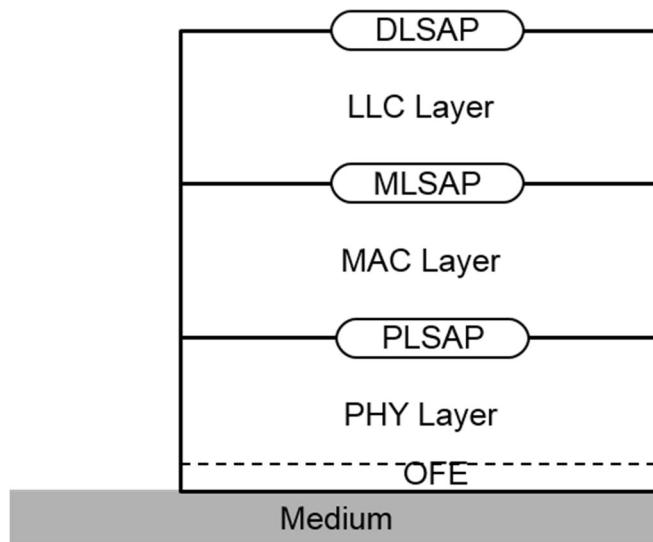


Figure 18: Signal conversion into medium

The Figure 18 illustrates the OFE as the piece of the PHY layer directly interacting with the medium. Often, the OFE is located very near to the modem circuitry of the LiFi interface with electrical signals directly propagated between the modem and the OFE circuits, i.e. photo diodes and LEDs.

However, sometimes it is desired to locate the OFE in further distance to the modem circuitry to extend the coverage area of a LiFi interface, or to collocate the signal processing of multiple modems in a central processing unit. For these cases it is required to deploy a dedicated communication system called 'Fronthaul' between Modem and OFE to carry the analogue or digital signals of the modem over longer distances. Fronthaul can deploy either digital or analogue transmission of electrical or optical signals.

Open fronthaul is represented in the reference architecture through the exposure of a dedicated interface between the modem part and the optical front end in the PHY layer.

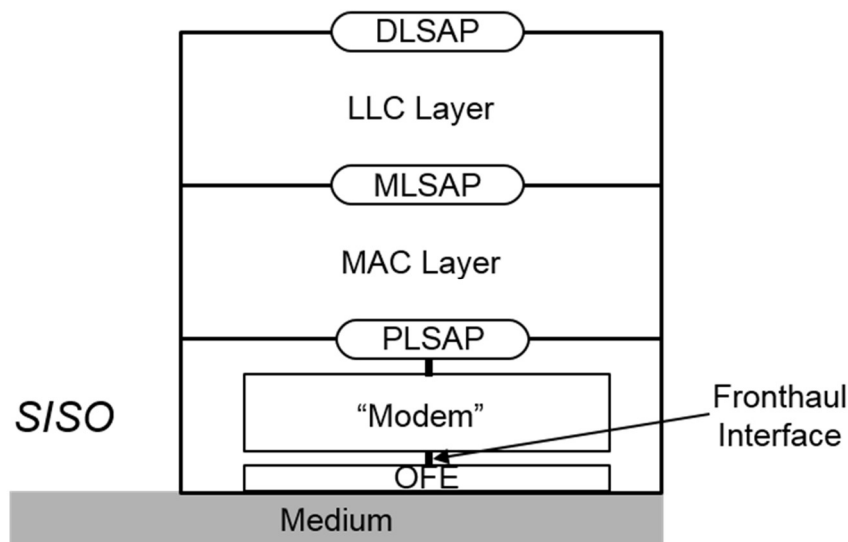


Figure 19: Representation of fronthaul in reference model

It is desired to establish interoperability between different solutions through a specification of the Fronthaul technology applied for LiFi.

4.5.4. MIMO

The application of multiple-input multiple-output (MIMO) techniques is widely discussed within the ELIOT project. As MIMO is around in RF communications since 1990ies, the task for ELIOT is not to develop the technology from bottom up but identify and select promising approaches which imply significant benefits for the deployment of LiFi in practical use cases.

So far, there is no optimal approach for MIMO in LiFi, because of the non-negative and real-valued nature of the intensity-modulation/direct detection (IM/DD) waveform. What is usually done is to apply a positive bias to the waveform and keep the modulation index small compared to the bias, in order to avoid clipping at the zero level. In this way, the LiFi channel can be modelled as a real-valued linear channel with additive white Gaussian noise. As a consequence, the theory of Shannon, which was extended by Foschini and Gans to the case of MIMO can be applied by only considering the real-valued nature of the channel.

More recently, an idea from powerline/phoneline communications was introduced to convert the real-valued channel into a complex valued channel. While a specific form of OFDM (i.e. discrete multitone, DMT) has been discussed since around 2004, originally introduced for LiFi by J. Grubor et al. from HH1, this has led to the conclusion that chipset changes would be needed for LiFi. But one can also apply the so-called frequency up-shift technique used for powerline, coax and phoneline in G.9960. In Figure 20, it is shown how RF waveforms are built together. Note that RF signals are real-valued, too. They are created from a complex-valued IQ baseband signal by up-conversion to the RF centre frequency, which is e.g. 2.4 GHz for Wi-Fi. For Light Communication (LC), which is the term used by IEEE 802.11 for LiFi, one could do the same but use a lower centre frequency around half the system bandwidth. In this way, standard complex-valued OFDM baseband signals commonly applied for RF communications can be applied for LiFi, too.



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

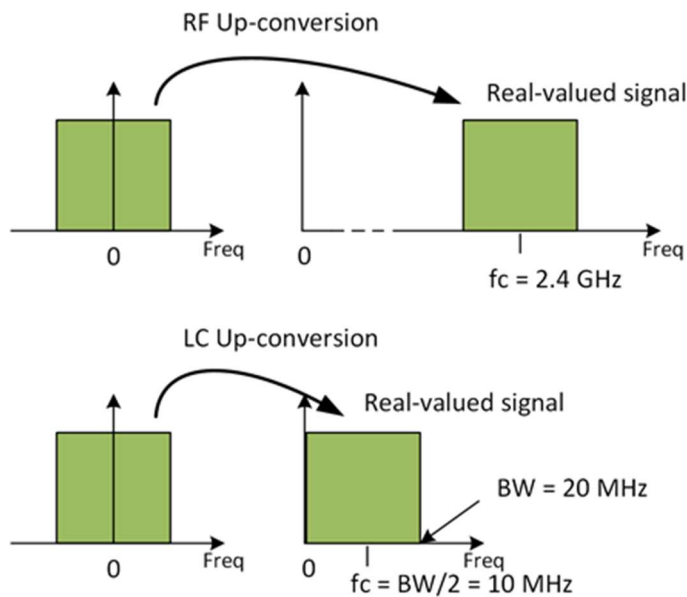


Figure 20: Reuse of existing signal processing schemes from RF for LiFi

With these three assumptions (bias, small modulation index, frequency upshift), LiFi can leverage all existing work for RF MIMO systems, and use the same system models, likewise.

In general, MIMO deploys multiple independent Optical Front-Ends (OFEs) which are functionally used as antennas controlled by a single PHY and MAC layer. Multiple OFEs can be used in different ways. In a peer-to-peer topology, see Figure 21, one terminal communicates directly with another terminal or access point. Depending on the numbers of transmitters and receivers one can distinguish single-input single-output (SISO), single-input multiple-output (SIMO), multiple-input single-output (MISO) and MIMO.

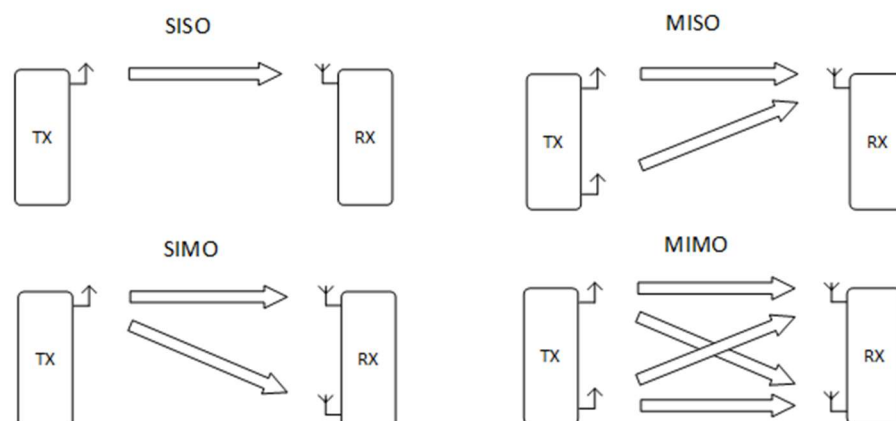


Figure 21: SISO – MISO – SIMO – MIMO

The above notation holds for peer-to-peer topology. MIMO becomes significantly more powerful if multiple terminals are served at the same time from one or multiple access points.

Single-user MIMO supports one or multiple data streams between one access point and one terminal at a time. Multi-user MIMO (MU-MIMO) supports multiple users from a single access point at the same time. Distributed MU-MIMO supports multiple terminals from a single access point at a central

location and controlling the transmission and reception of distributed antennas or optical frontends in the service area.

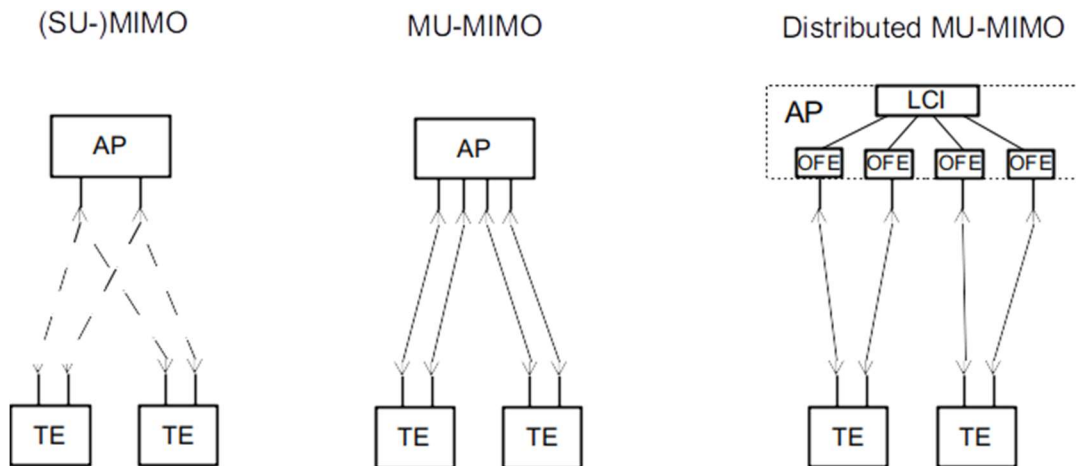



Figure 22: Different configurations when using multiple antennas/OFEs for single and multiple users

For better comprehension, the peer-to-peer configuration is often considered as a special case of MU-MIMO with a single terminal served at the same time, see Figure 22. During connection setup, the terminal which starts the communication assumes the role of an access point. In a different setting at the MAC layer, the role of an access point is manually assigned.

Note that the above notations make no indication at all about the number of data streams transmitted in parallel. All configurations can be used in two different transmission modes

- spatial diversity: transmitting a single data stream via multiple antennas/OFEs
- spatial multiplexing: transmitting multiple data streams from multiple antennas/OFEs.

For multiple terminals, the notations a) and b) are changed into multiuser diversity and multiuser multiplexing, respectively.

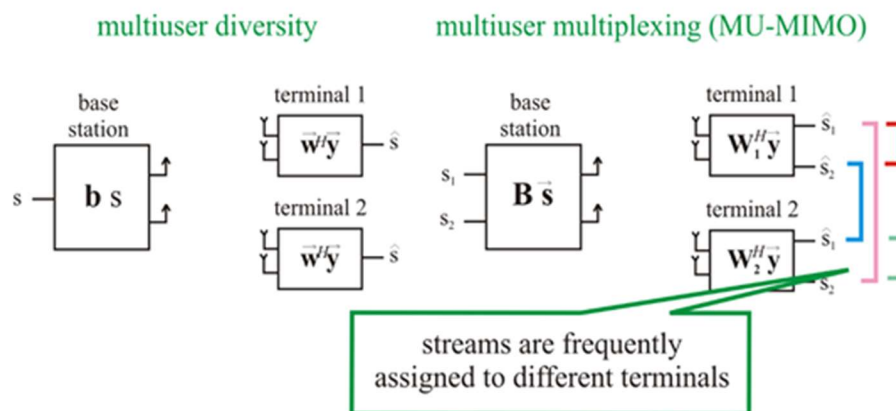

Note: The various possible transmission modes indicated by square brackets.

Figure 23: Multiuser diversity vs. multiuser multiplexing

Deciding which transmission mode is being used and what combination of antennas/OFEs and users is handled jointly is done in the central medium access (MAC) layer which is a single entity situated in the single access point in any configurations. The MAC layer needs to decide which transmission mode

(diversity or multiplexing) and what selection of antennas and terminals is best used out of all possible choices, based on feedback information received over the reverse link from all terminals. The optimal MIMO mode selection, and the associated signal processing at the PHY layer, are a coupled NP-hard problem. In order to reduce complexity, several heuristics have been proposed in the literature. These heuristics are called efficient if the performance loss when using them is small but the complexity is significantly reduced compared to the optimal solution.

MIMO operation is reflected in the reference model through multiple OFEs being connected to the Modem part of the PHY layer. The Figure 24 below depicts the extension for the SU-MIMO case with a single data exchange with a peer being executed at a time.

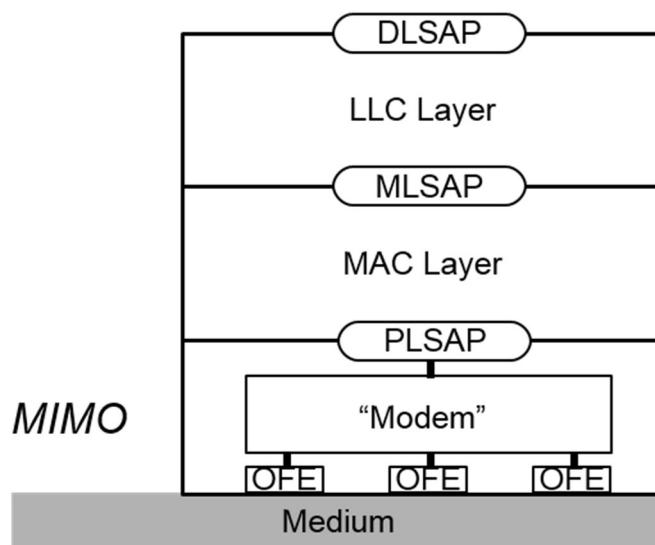


Figure 24: MIMO extension to reference model

In the case of MU-MIMO the reference model is extended to show that the “Modem” provides multiple independent interfaces to multiple OFEs through multiple parallel PLSAPs.

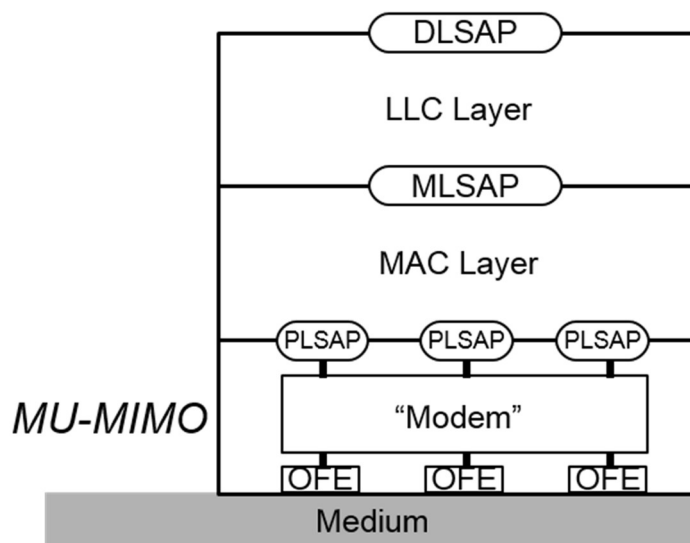


Figure 25: Multi-User MIMO model

In the case of MU-MIMO multiple communication peers can be served in parallel.



This project has received funding from the European Union’s Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

4.5.5. Positioning

The required amendments to the LiFi open reference architecture to fully cover positioning through LiFi are still under discussions and development at the time of release of this initial version of the LiFi open reference architecture.

The amendments for positioning will be contained in the final release D3.3 of this document.

4.6. Comprehensive reference architecture

All the extensions to the basic reference model introduced in clause 4.5 are completely independent of each other and they can be combined in a comprehensive reference architecture as shown below.

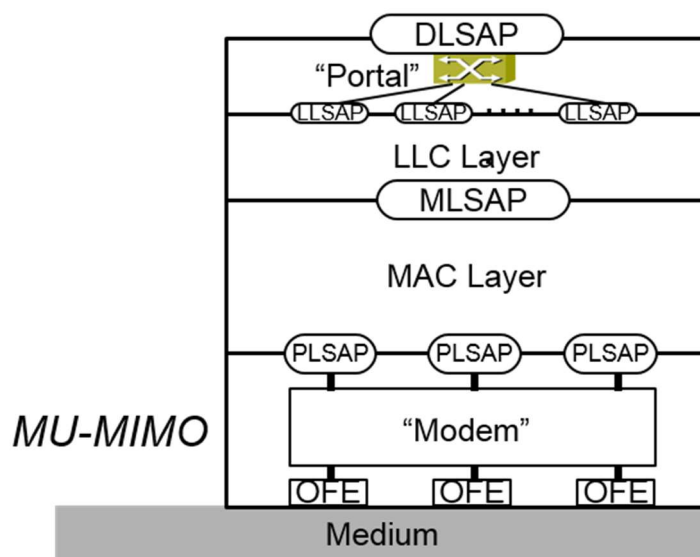


Figure 26: Comprehensive LiFi reference model of data path

The Figure 26 shows the combination of the AP functional extension, exposure of fronthaul interfaces, and MU-MIMO in the data path of the LiFi open reference architecture. Positioning is not yet covered in the model. Furthermore, the management entities of the PHY layer, MAC layer, and LLC layer are missing in the figure, as well as the system management entity with the external control interface of the LiFi interface, but all of them look exactly the same as depicted in the basic open reference architecture in Figure 13.

4.7. Open issues

During the ELIOT project the LiFi open reference architecture will be revised to capture the results developed in the project, and to better serve its objectives to provide a highly versatile model for unification of external interface behaviour of different designs of LiFi interfaces.

In addition to the currently missing amendment for positioning, enhancements are expected for better alignment of the fronthaul architecture for LiFi to the solutions investigated in ELIOT, for a more uniform definition of the open interfaces to better cope with the various LiFi standards, and for a more concise definition of the functions of the open interfaces of the reference architecture.

A further area of improvements could be the architectural support of QoS, high reliability, and time-bounded communications over LiFi. The abundance of the transmission resources of the light medium

and the easy manageability of exclusive access could allow for the same QoS capabilities as available in 5G cellular communications. So far, no work has been done for non-cellular technologies to provide the architectural prerequisites to enable matching capabilities and management models.

5. Relation to standards-specific reference architectures

The LiFi open reference architecture is aimed to provide a common framework for the current light communications standards or standardization projects. This section explains the mapping and close alignment of the ELIOT LiFi open reference architecture with the most evolved LiFi specifications in the industry.

5.1. Terminology mapping

The following table provides the mapping between the terminology used by the ELIOT LiFi open reference architecture and the equivalent terminology used by IEEE 802.11 [2], IEEE P802.15.13 [3], and ITU-T G.9991 [4]. Terms that are not equivalent but still loosely comparable are given in brackets.

ELIOT	IEEE 802.11 [2]	IEEE P802.15.13 [3]	ITU-T G.9991 [4]
LiFi interface	Station	Device	Node
Terminal	Non-AP STA	Device	End point device
Access point	Access point	Coordinator	Domain master (DM)
-	[Portal]	Master coordinator	Global master (GM)
Backhaul	Distribution system (DS)	Backhaul	[Global master]
-	Basic service set (BSS)	Optical wireless personal area network (OWPAN)	Domain
APID	Basic service set ID (BSSID)	OWPAN ID	Domain ID
LiFi Communication Service (LCS)	Extended service set (ESS)	-	-
Optical frontend (OFE)	[Antenna]	Optical frontend (OFE)	-
Fronthaul	-	Fronthaul	-

Table 2: Terminology mapping (Definitions of ELIOT terms are provided in clause 4.1.2)

5.2. Relation to IEEE 802.11 reference model

The basic reference model of IEEE 802.11 that applies also to the amendment P802.11bb for light communications is provided through figure 4-19 of [2].



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

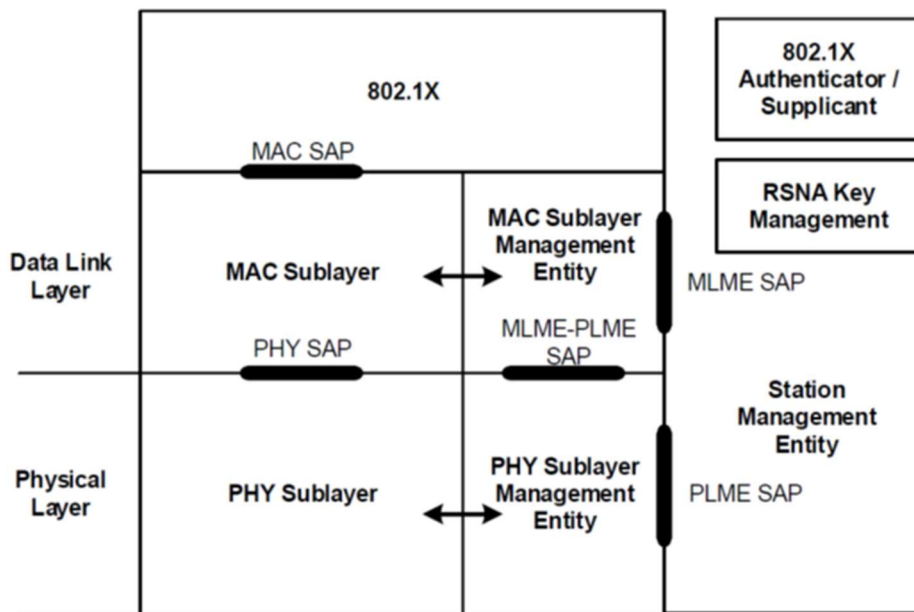


Figure 4-19—Portion of the ISO/IEC basic reference model covered in this standard

Figure 27: IEEE 802.11 reference architecture

The basic reference architecture of IEEE 802.11 is closely aligned to the LiFi open reference architecture introduced above. The models apply the same layering as well as the same functional entities with nearly identical definitions and notations.

A major difference is the existence of open interfaces for system integration. While the LiFi open reference architecture provides open interfaces for the data path as well as the external control and management interface, IEEE 802.11 does not specify either of them. Interoperability of IEEE 802.11 only covers the interface over the transmission medium represented through a set of internal reference points in the architecture, which makes system integration of IEEE 802.11 often a challenge.

To overcome that burden, the LINUX community established a network interface driver project called mac80211 that defines an open approach to the external interfaces of an IEEE 802.11 device deployed within a LINUX based system. mac80211 comprises a common configuration system called cfg80211 that can interact with two variants of implementation of the MAC layer and LLC layer functions. The Full-MAC variant mostly implements all MAC and LLC functions through microcode in the chipset, while the Soft-MAC variant realizes major parts of the MAC and LLC functions through software in the host system with only very time critical processes handled within the chipset.



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

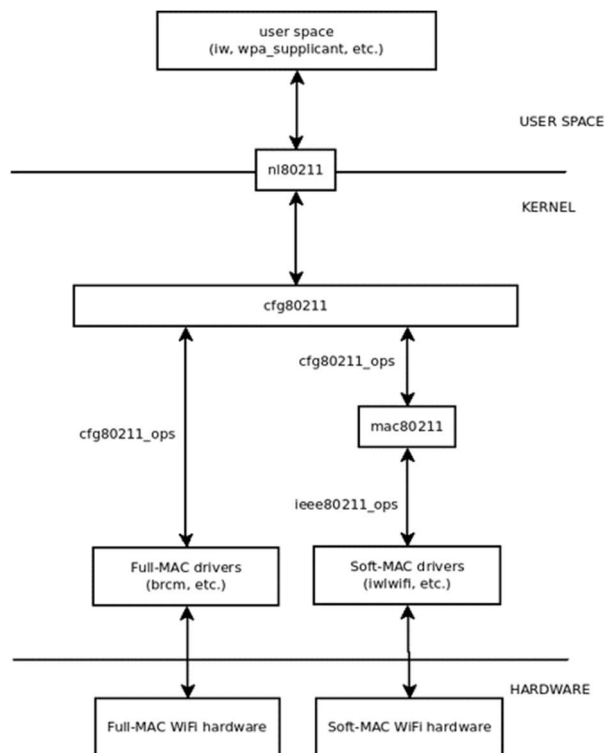


Figure 28: Implementation of IEEE 802.11 within mac80211

For communication between the mac80211 driver that is located in the kernel, and the applications that reside in the user space the interface module nl80211 [5] has been developed and it has become de-facto standard for Wi-Fi configuration in LINUX. The nl80211 is based on the *netlink* protocol for communication between kernel and user space and allows access to most of the PHY, MAC and SME parameters of a Wi-Fi radio interface as defined in cfg80211. Chip vendors have to provide driver code to map their internal data models to the structure defined by cfg80211. By this way, finally an open interface for configuration and management of IEEE 802.11 interfaces has been established. However, it is limited to the deployments within LINUX based systems.

5.3. Relation to IEEE 802.15.13 reference architecture

Even if not immediately apparent, the reference architecture of IEEE P802.15.13 [3] follows also the same approach as the open reference architecture. It is depicted below and shows the same functional entities as defined in the open reference architecture with the major difference that the data path and the management is kept together for each layer, and the device management entity communicates through the MAC layer management entity with the PHY layer management entity.

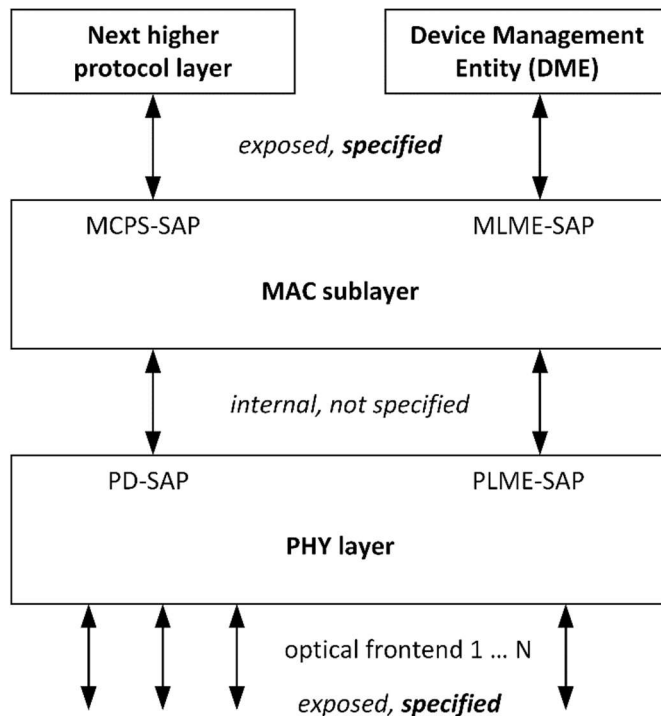


Figure 29: IEEE P802.15.13 reference architecture

Like IEEE 802.11, the IEEE P802.15.13 architecture does not specify external interfaces that are suited for system integrators. Again, the open reference architecture with its open external interfaces and with internal interfaces kept informational does not contradict but nicely complements the P802.15.13 reference architecture.

5.4. Relation to ITU-T G.9991 reference architecture

There is not a single ITU-T G.9991 reference architecture, but four parts that each focus on one single functional aspect. The three functional aspects closely related to the open reference architecture explained below are data path, layer management, and system control and management. The fourth part addresses additional functions required for network integration.

5.4.1. Datapath

The datapath reference model of G.9991 [4] follows the same layering principles applied for the open reference architecture. To allow for highest flexibility regarding the medium used for transmission, and regarding the support of higher layer protocols both the data link layer as well as the PHY layer are divided in three sublayers.



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

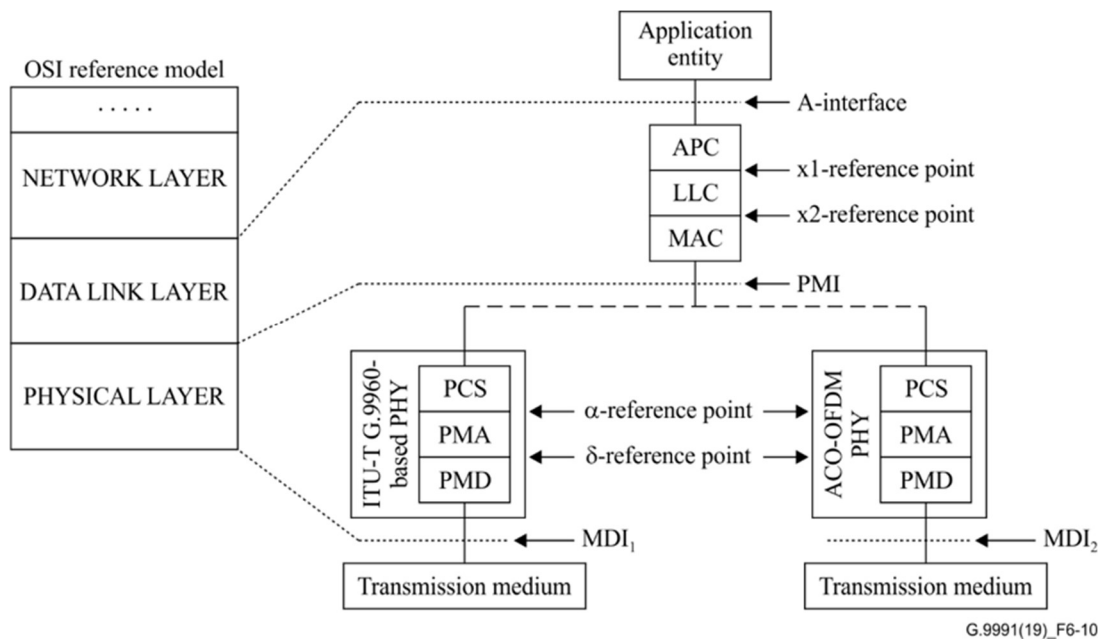


Figure 30: Datapath reference architecture of G.9991

Due to this fine grain sublayering the G.9991 model comprises many more reference points than the IEEE reference models or the open reference architecture to enable higher variability of PHY interfaces as well as support of applications not closely following the ISO-OSI communication model.

5.4.2. Interfaces

The specification of G.9991 defines open interfaces for the data path as well as for the layer management of the Data Link layer as well as the PHY layer. Even when not spelled out in the G.9991 specification, the data primitives establish an interface comparable to the LLSAP, and the control primitives are equivalent to the internal function definitions of the PMSAP, MMSAP, and LMSAP of the open reference architecture.

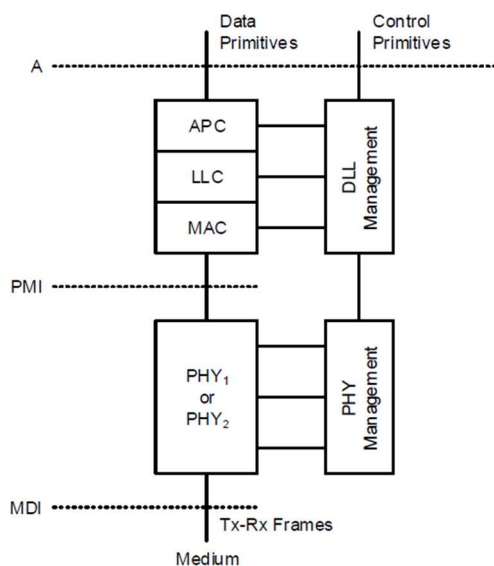


Figure 31: Open interfaces of G.9991



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

However, the data primitives as well as the control primitives are differently structured compared to the open reference architecture, but equivalent functionality is available on the interfaces.

5.4.3. Management entity

The G.9991 specification is currently not optimized for deep integration with a host CPU, like in the case of the open reference architecture and the IEEE P802.11bb and P802.15.13 developments. G.9991 assumes solutions are aimed to emulate a standard interface like USB or Ethernet, with a communication interface for control and management.

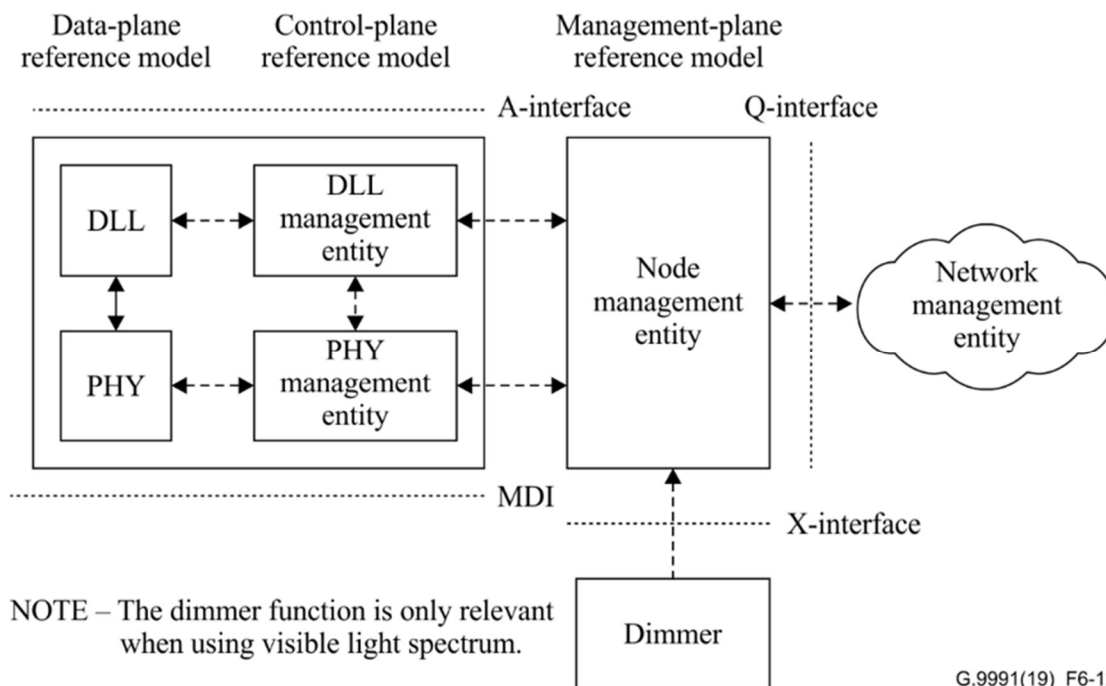


Figure 32: Management model of G.9991

Both, the Q-interface as well as the X-interface could be considered in the scope of the SMSAP of the open reference architecture. It can be expected that conversion between the SMSAP and the Q- and X- interfaces can be accomplished through a management and configuration proxy.

6. Integration with network reference architectures

While the previous section compared the open reference architecture with the reference architectures of the main standardization projects of light communication interfaces, this section addresses the deployment of the open reference architecture within the network reference models describing the design of IEEE 802 based access networks and the usage of non-3GPP access technologies in the scope of the 5G mobile network.

6.1. Integration of LiFi within IEEE 802.1CF

IEEE 802.1CF [6] provides a network reference model and functional description of IEEE 802 access network. It is defined to cover all the interface technologies developed by IEEE 802 that support the transport of Ethernet data frames carrying MAC addresses as the source and destination address of the layer 2 communication path [7]. Forwarding of the data frames in the network elements along the communication path is performed through bridging as specified in IEEE 802.1Q [8].



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

The IEEE 802 network reference model denotes by R1 the reference point between the Terminal Interface and the node of attachment (NA) that could be realized through LiFi. The functions comprised in the open reference architecture are embedded in the Terminal Interface as well as in the NA with DLSAP and SMSAP representing internal interfaces of Terminal Interface and NA, respectively. For both, Terminal and NA, further processing on top of DLSAP and SMSAP must be present to realize the control interfaces specified for the network reference model. Therefore, the LiFi open reference architecture provides a suited building block that can be well deployed attached to a host computer in access network designs following IEEE 802.1CF.

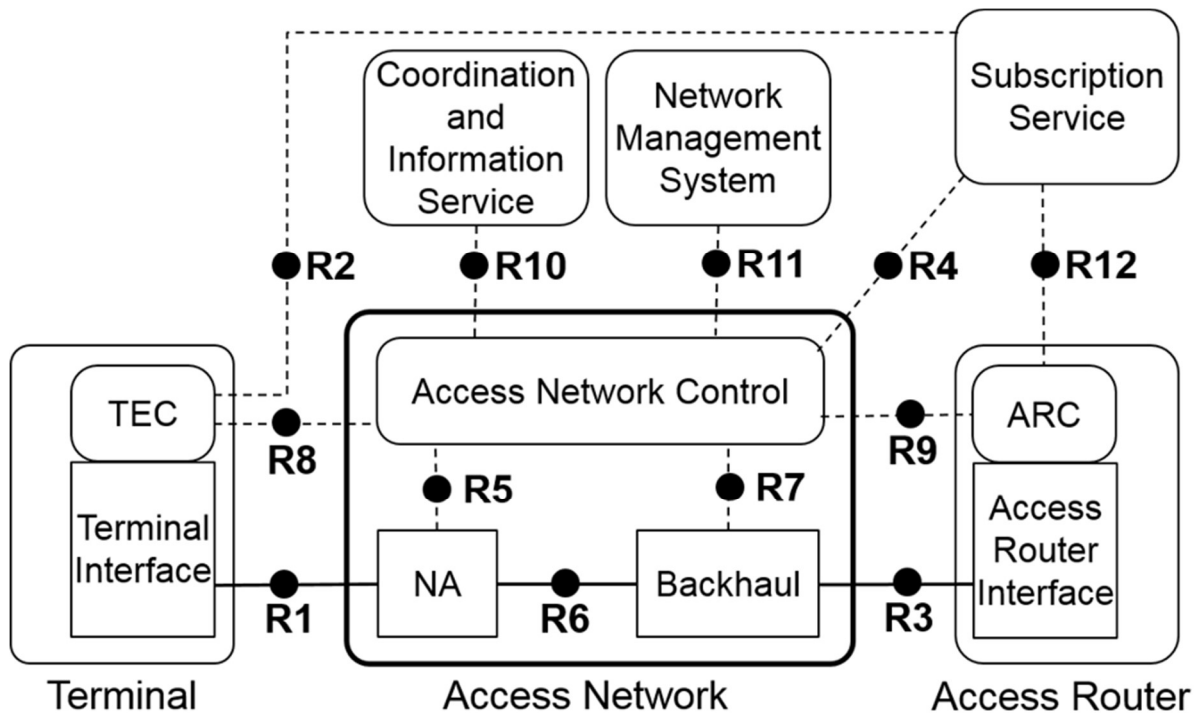


Figure 33: IEEE 802.1CF network reference model

Open reference architecture describes not complete NA but function usually implement in chip sets with some additional management entity needed to realize R5.

6.2. Integration of LiFi within TS 23.501

In its TS 23.501 System Architecture for the 5G System [9] specification, 3GPP provides an architectural concept for deployment of non-3GPP accesses within a 5G system. The approach specified by 3GPP in clause 4.2.8.2.1 of [9] is depicted below.



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

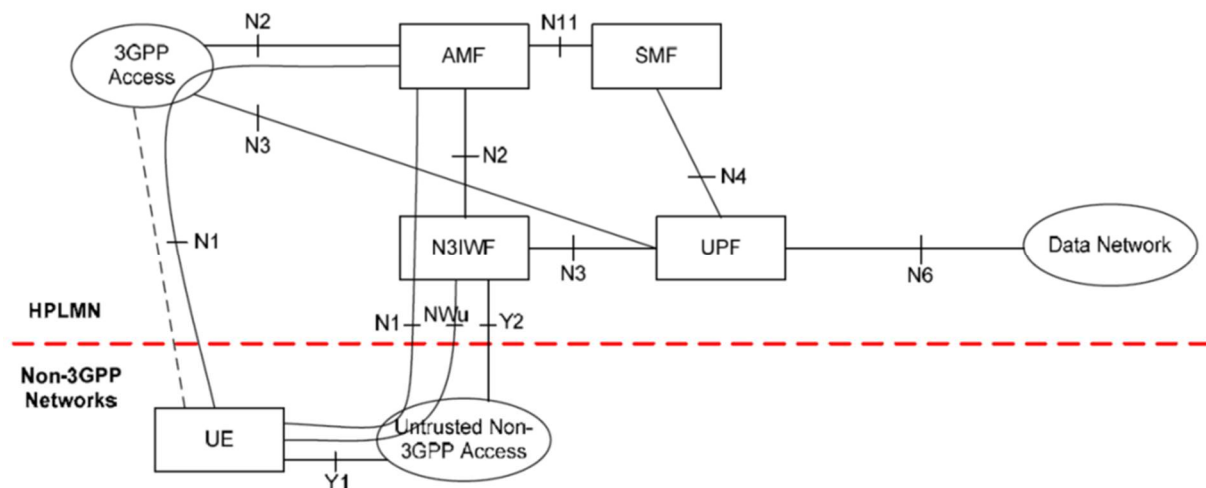


Figure 34: TS 23.501 reference architecture for integration of non-3GPP access technologies

The 3GPP specification does not provide the capability to attach a foreign interface technology to the 5G system but defines the architecture to interwork with non-3GPP networks deploying other kind of interfaces. Therefore, TS 23.501 assumes that the foreign interface technology is embedded in a non-3GPP access network and only provides the functions to interoperate on network layer and above.

Nevertheless, LiFi can be deployed in a 5G system based on TS 23.501, when the LiFi interface is used by an access network, that e.g. follows the IEEE 802.1CF specification. The IEEE 802.1CF network reference model and functional specification may be leveraged to define the additional functions required to make LiFi working in the TS 23.501 context. IEEE 802.1CF provides on its R3, R4, and R9 reference points the interfaces for the non-3GPP access technology that TS 23.501 expects.

However, the 3GPP interworking model with untrusted non-3GPP accesses lacks the support for QoS support beyond best-effort services. Additional investigations are desired to enable the deployment the QoS capabilities of LiFi in a 5G system environment.

7. Reference model software

For further study.

8. Conclusion and outlook

This specification specifies the initial version of the LiFi open reference architecture to facilitate harmonized implementations of various use cases to demonstrate the potentials and unique features of light communications for the Internet of Things. The open reference architecture enables synergies in the deployment of LiFi through the definition of common interfaces for system integration. Example use cases and the derivation of a common architecture of the LiFi interface builds the base for the definition of open interfaces for the data path as well as the control of the LiFi interface circuitry. Various extensions to the open reference architecture are proposed to accommodate enhanced functional requirements, like the separation and spatial distribution of the optical front end from the modem part through fronthaul links, or enhancements in throughput as well as coverage through the deployment of MIMO technologies.



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

The document also shows that the proposed open reference architecture is aligned with all existing LiFi standardization and can progress the technology towards unified interfaces regardless of the standards or design principles used for implementation. Through investigation of integration with common network architectures as specified through IEEE 802.1CF and 3GPP TS 23.501 the usability of the open reference architecture for real networks was verified.

Not yet covered by the document is the establishment of an open software library to facilitate aligned enhancements to LiFi technology through common building blocks for simulation and evaluation.

Further refinements of the reference architecture are planned for the final version of the document to facilitate a much wider range of use cases and provide better guidance for harmonization of interfaces and functions across the various standardization projects.



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

References

- [1] ISO/IEC 7498-1, Information technology — Open Systems Interconnection — Basic Reference Model: The Basic Model, 1994.
- [2] IEEE Std 802.11-2016, IEEE Standard for Information technology—Telecommunications and information exchange between systems—Local and metropolitan area networks—Specific requirements—Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY).
- [3] IEEE P802.13/D8, Draft Std. for Multi-Gigabit per Second Optical Wireless Communications (OWC) with Ranges up to 200 meters.
- [4] ITU-T G.9991 (03/2019), SERIES G: TRANSMISSION SYSTEMS AND MEDIA, DIGITAL SYSTEMS AND NETWORKS; Access networks – In premises networks: High-speed indoor visible light communication transceiver – System architecture, physical layer and data link layer spec.
- [5] „nl80211,“ [Online]. Available: <http://git.kernel.org/cgit/linux/kernel/git/linville/wireless.git/tree/include/uapi/linux/nl80211.h?id=HEAD>.
- [6] IEEE Std 802.1CF-2019, IEEE Recommended Practice for Network Reference Model and Functional Description of IEEE 802 Access Network.
- [7] IEEE Std 802-2014, IEEE Standard for Local and Metropolitan Area Networks—Overview and Architecture..
- [8] *IEEE Std 802.1Q-2018, IEEE Standard for Local and Metropolitan Area Network- Bridges and Bridged Networks.*
- [9] 3GPP TS 23.501 V16.2.0 Release 16 (2019-09), System Architecture for the 5G System.



This project has received funding from the European Union’s Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

List of figures

Figure 1: Office – system architecture overview	10
Figure 2: Terminal moving within LiFi AP coverage area	11
Figure 3: Terminal moving between LiFi APs with isolated coverage areas	11
Figure 4: Terminal moving between LiFi APs with overlapping coverage areas	12
Figure 5: Terminal moving out of LiFi coverage area, remaining in Wi-Fi coverage area (different APs)	13
Figure 6: Terminal moving out of LiFi coverage area, remains in Wi-Fi coverage area (single AP)	13
Figure 7: System architecture overview of consumer home use case	14
Figure 8: Connection of the home gateway to LiFi hotspots using power line communications	15
Figure 9: Connection of the home gateway to LiFi hotspots using plastic optical fiber	15
Figure 10: System architecture of FWA use case	17
Figure 11: Scope of reference architecture in end-to-end communication architecture	18
Figure 12: Mobility scenarios	20
Figure 13: Basic reference architecture	21
Figure 14: Protocol data unit concatenation through successive preceding of header information	23
Figure 15: Open interfaces in reference architecture model	24
Figure 16: Datapath section of basic open reference architecture	28
Figure 17: Link layer extensions for AP functionality	29
Figure 18: Signal conversion into medium	30
Figure 19: Representation of fronthaul in reference model	31
Figure 20: Reuse of existing signal processing schemes from RF for LiFi	32
Figure 21: SISO – MISO – SIMO - MIMO	32
Figure 22: Different configurations when using multiple antennas/OFEs for single and multiple users	33
Figure 23: Multiuser diversity vs. multiuser multiplexing	33
Figure 24: MIMO extension to reference model	34
Figure 25: Multi-User MIMO model	34
Figure 26: Comprehensive LiFi reference model of data path	35
Figure 27: IEEE 802.11 reference architecture	37
Figure 28: Implementation of IEEE 802.11 within mac80211	38
Figure 29: IEEE P802.15.13 reference architecture	39
Figure 30: Datapath reference architecture of G.9991	40
Figure 31: Open interfaces of G.9991	40
Figure 32: Management model of G.9991	41
Figure 33: IEEE 802.1CF network reference model	42
Figure 34: TS 23.501 reference architecture for integration of non-3GPP access technologies	43



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)

List of tables

Table 1: Mobility terminology	20
Table 2: Terminology mapping (Definitions of ELIOT terms are provided in clause 4.1.2)	36



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 825651 (ELIOT)